

08/18/00
JC715 U.S. PTO

PTO/SB/05 (12/97)
Approved for use through 09/30/00. OMB 0651-0032
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

**UTILITY
PATENT APPLICATION
TRANSMITTAL**

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No. 2000 1134A

Total Pages :

First Named Inventor or Application Identifier

Hirotsugu KAWADA et al.

Express Mail Label No.:

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO: Assistant Commissioner for Patents
Box Patent Application
Washington, D.C. 20231

1. [X] Fee Transmittal Form
(Submit an original, and a duplicate for fee processing)
2. [x] Specification [Total Pages -80]
(preferred arrangement set forth below)
- Descriptive title of the Invention
 - Cross References to Related Applications
 - Statement Regarding Fed sponsored R & D
 - Reference to Microfiche Appendix
 - Background of the Invention
 - Brief Summary of the Invention
 - Brief Description of the Drawings (if filed)
 - Detailed Description
 - Claim(s)
 - Abstract of the Disclosure
3. [x] Drawing(s) (35 USC 113) [Total sheets -15]
4. [x] Oath or Declaration [Total Pages - 3]
- a.1. ☐ Newly executed (original or copy)
- a.2. [x] Unexecuted
- b. ☐ Copy from a prior application (37 CFR 1.63(d))
(for continuation/divisional with Box 17 completed)
[Note Box 5 below]
- i. ☐ DELETION OF INVENTOR(S)
Signed statement attached deleting inventor(s)
named in the prior application, see 37 CFR
1.63(d)(2) and 1.33(b).
5. ☐ Incorporation By Reference
(usable if Box 4b is checked)
The entire disclosure of the prior application, from which
a copy of the oath or declaration is supplied under Box
4b, is considered as being part of the disclosure of the
accompanying application and is hereby incorporated by
reference therein.

6. Microfiche Computer Program (Appendix)
7. ☐ Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)
- a. ☐ Computer Readable Copy
- b. ☐ Paper Copy (identical to computer copy)
- c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

8. ☐ Assignment Papers (cover sheet & document(s))
9. ☐ 37 CFR 3.73(b) Statement ☐ Power of Attorney
(when there is an assignee)
10. ☐ English Translation Document (if applicable)
11. ☐ Information Disclosure Statement (IDS)/PTO-1449
☐ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. [X] Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)
14. ☐ Small Entity Statement(s)
15. ☐ Statement filed in prior application, Status still proper and desired
16. ☐ Certified Copy of Priority Document(s)
(if foreign priority is claimed)
17. ☐ Other

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:
- ☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior Application No.

18. CORRESPONDENCE ADDRESS

WENDEROTH, LIND & PONACK, L.L.P.
2033 "K" Street, N.W.
Suite 800
Washington, D.C. 20006
Phone:(202) 721-8200
Fax:(202) 721-8250

August 18, 2000

THE COMMISSIONER IS AUTHORIZED
TO CHARGE ALL OFFICIAL COPY AND
FEE FOR THIS PAPER TO DEPOSIT
ACCOUNT NO. 25-0975.

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re application of :
Hirotsugu KAWADA et al. :
Serial No. NEW : Attn: APPLICATION BRANCH
Filed August 18, 2000 : Attorney Docket No. 2000_1134A

DATA PLAYER, DIGITAL CONTENTS PLAYER,
PLAYBACK SYSTEM, DATA EMBEDDING
APPARATUS, AND EMBEDDED DATA
DETECTION APPARATUS

PATENT OFFICE FEE TRANSMITTAL FORM

Assistant Commissioner for Patents
Washington, DC 20231

Sir:

Attached hereto is a check in the amount of \$1,914.00 to cover Patent Office fees relating to filing the following attached papers:

New application \$1,914.00

A duplicate copy of this paper is being submitted for use in the Accounting Division, Office of Finance.

The Commissioner is authorized to charge any deficiency or to credit any overpayment associated with this communication to Deposit Account No. 23-0975, with the EXCEPTION of deficiencies in fees for multiple dependent claims in new applications.

Respectfully submitted,

Hirotsugu KAWADA et al.

By



Michael S. Huppert

Registration No. 40,268

For

Nils E. Pedersen

Registration No. 33,145

Attorney for Applicants

MSH/tf
WENDEROTH, LIND & PONACK, L.L.P.
2033 K St., N.W., Suite 800
Washington, D.C. 20006
Telephone (202) 721-8200
August 18, 2000

[Check No. 39381]

2000_1134A



DATA PLAYER, DIGITAL CONTENTS PLAYER, PLAYBACK SYSTEM,
DATA EMBEDDING APPARATUS, AND
EMBEDDED DATA DETECTION APPARATUS

FIELD OF THE INVENTION

The present invention relates to a data player, a playback system, a data embedding apparatus, and an embedded data detection apparatus, which are able to detect or prevent illegal use of contents of digital media when the contents are copyrighted.

BACKGROUND OF THE INVENTION

There is a digital versatile disk player (DVD player) as an example of a conventional data player. In a DVD player, data written on a disk (DVD) is encrypted so that a player which does not adopt means for copyright protection cannot play the data on the disk and, therefore, only a player which is legally provided with a key can play the disk. Generally, the key required for playback is given to each DVD player.

Hereinafter, an example of a conventional data player will be described with reference to figure 18.

Figure 18 is a block diagram illustrating an example of a conventional data player.

In figure 18, reference numeral 1000 designates a key storage unit which stores a contents key for decoding encrypted contents 1202 recorded on a digital medium 1200, and reference numeral 1100 designates a data player. The key storage unit 1000

comprises a controller 1001 and a key storage 1002 which stores the contents key. The data player comprises a controller 1101, a contents key holder 1102 which takes the contents key from the key storage unit 1000 and holds it, a reader 1104 which reads the encrypted contents 1202 from the digital medium 1200, an encrypted contents decoder 1105 which decodes the encrypted contents 1202, a player 1106 which plays the decoded contents, a signal output unit 1107 which outputs the contents to the outside, and a user operation input unit 1108 which transmits an instruction from the user to the controller 1101.

Hereinafter, a description will be given of the operation of the data player 1100 in the case where the user instructs the data player 1100 to play the contents of the digital medium 1200, through the user operation input unit 1108.

Before playing the encrypted contents 1202, the data player 1100 communicates with the controller 1001 of the key storage unit 1000 using the controller 1101, and proves that it is eligible to play the encrypted contents 1202 in the digital medium 1200. When the controller 1001 of the key storage unit 1000 confirms that the data player 1100 is eligible for playback, the data player 1100 receives the contents key from the key storage unit 1000 and stores it in the contents key holder 1102. Thereafter, the reader 1104 reads the encrypted contents 1202 from the digital medium 1200, and the decoder 1105 decodes the encrypted contents 1202 using the contents key which has been

003130-0320920

stored, thereby obtaining plaintext contents. The plaintext contents are played by the player 1106 and then outputted as a signal by the signal output unit 1107. In this construction, when performing playback of specific encrypted contents existing on a digital medium, the data player 1100 is confirmed by the key storage unit 1000 as to whether it is eligible for playing the encrypted contents or not. Thereby, the encrypted contents on the digital medium are prevented from being played by an illegal player which is not eligible for playback.

On the other hand, with respect to electronic distribution of movies to theaters or video services in airplanes, there are some movies which have not yet been released in theaters and, therefore, it is desired that the periods during which these movies can be played are controllable. As a system for accessing such data, Japanese Published Patent Application No. Hei.10-341212 discloses an encryption text transmission system. In this system, a key is provided with data about its available period or place, and the present time or position is detected when using the key, whereby the use of the key can be controlled according to whether the present time is within the available period or whether the present position where the key is used is within the available place. Further, the use of the key can be controlled by periodically recording time data and comparing the time data with the present time.

Further, it has been proposed that, when playing data, the

ID number of a player which plays the data is embedded in the played data. Thereby, if the played data is illegally copied and sold, a player which assisted the illegal act can be identified.

In the conventional data player, however, once a data player is recognized as being eligible for playing specific contents by the key storage unit and then obtains a contents key and stores it in the contents key storage, the player can illegally plays other encrypted contents by using the stored contents key even when the player is not eligible to play the contents.

Further, in the method disclosed in Japanese Published Patent Application No. Hei.10-341212, since the time data or position data is judged after transmitting the key to the player end, there is a risk that the key is obtained illegally. Further, there is a risk that the recorded time data is altered and the key is obtained illegally.

Furthermore, in the case where the data such as the player's ID number is embedded in the played data, the embedded data must be detected correctly. However, when the number of embedded data increases, it is difficult to detect all of them correctly and, further, there is no means to confirm whether the result of detection is correct or not.

SUMMARY OF THE INVENTION

The present invention is made to solve the above-described problems and has for its object to provide a data player, a digital contents player, a playback system, a data embedding

008780-03207950

Other objects and advantages of the invention will become apparent from the detailed description that follows. The detailed description and specific embodiments described are provided only for illustration since various additions and modifications within the scope of the invention will be apparent to those of skill in the art from the detailed description.

According to a first aspect of the present invention, there is provided a data player for reading contents encrypted by a decoding key from a digital medium, and playing the encrypted contents by using the decoding key which is stored in a key storage unit. This data player comprises key obtaining means for performing mutual authentication with the key storage unit to obtain the decoding key stored in the key storage unit; key holding means for holding the decoding key; playback state obtaining means for monitoring the playback state of the digital medium; and contents decoding means for decoding the encrypted contents by using the decoding key. The decoding key is obtained by the key obtaining means and stored in the key holding means, the encrypted contents read from the digital medium is decoded with the decoding key by the contents decoding means to play the

contents, and the decoding key stored in the key holding means is discarded according to the playback state of the digital medium which is obtained by the playback state obtaining means. Therefore, illegal use of the key is avoided, whereby illegal playback of the contents by an ineligible player is avoided.

According to a second aspect of the present invention, in the data player of the first aspect, the decoding key stored in the key holding means is discarded when it is confirmed that the playback state of the digital medium has become "STOP STATE". Since the playback state of the player is always monitored and the key is discarded when the playback state has become "STOP STATE", illegal use of the key is avoided.

According to a third aspect of the present invention, in the data player of the first or second aspect, the digital medium is a DVD. Therefore, illegal playback of the contents in the DVD by an ineligible player is avoided.

According to a fourth aspect of the present invention, there is provided a data player for reading contents encrypted by a contents key and the contents key encrypted by a decoding key, from a digital medium, and playing the encrypted contents by using the decoding key which is stored in a key storage unit. This data player comprises key obtaining means for performing mutual authentication with the key storage unit to obtain the decoding key stored in the key storage unit; key holding means for holding the decoding key; playback state obtaining means for

09640783.084800

monitoring the playback state of the digital medium; encrypted contents key decoding means for decoding the encrypted contents key by using the decoding key to obtain the contents key; and encrypted contents decoding means for decoding the encrypted contents by using the contents key. The decoding key is obtained by the key obtaining means and stored in the key holding unit, the encrypted contents key read from the digital medium is decoded with the decoding key by the contents key decoding means to obtain the contents key, the encrypted contents read from the digital medium is decoded by using the contents key to play the contents, and the decoding key stored in the key holding means is discarded according to the playback state of the digital media which is obtained by the playback state obtaining means. Therefore, illegal use of the key is avoided, whereby illegal playback of the contents by an ineligible player is avoided.

According to a fifth aspect of the present invention, in the data player of the fourth aspect, the decoding key stored in the key holding means is discarded when it is confirmed that the playback state of the digital medium has become "STOP STATE". Since the playback state of the player is always monitored and the key is discarded when the playback state has become "STOP STATE", illegal use of the key is avoided.

According to a sixth aspect of the present invention, in the data player of the fourth or fifth aspect, the digital medium is a DVD. Therefore, illegal playback of the contents in the DVD by

09040703-081800

an ineligible player is avoided.

According to a seventh aspect of the present invention, there is provided a key storage device comprising decoding key storage means for storing a decoding key for decoding encrypted data recorded on a digital medium; key read authorization means for authorizing an external device to read the decoding key when the external device plays the encrypted data; and key read history recording means for recording the readout record of the decoding key to the external device. The decoding key includes available period data which is the available period for reading the decoding key, and the key read authorization means receives a key request signal including a key read time which is the time when the external device made a request to read the decoding key, and authorizes the external device to read the decoding key after confirming that the key read time is later than the latest time amongst the read history data of the decoding key which is stored in the key read history storage means, and that the key request time is within the key read available period, and that the key read history data has been recorded by the key read history recording means. Therefore, an illegality relating to the key with the available period, such as setting back the time to be declared, is avoided, whereby illegal reception of the key is avoided.

According to an eighth aspect of the present invention, in the key storage device of the seventh aspect, the key read

history recording unit generates and records, in addition to the key read history data, an alteration detection code by which alteration on the key read history data can be detected. Therefore, alteration of the key read history data is made difficult.

According to a ninth aspect of the present invention, in the key storage device of the seventh or eighth aspect, the key read authorization means authorizes the external device to read the decoding key after confirming that the key read history data is not altered, from the alteration detection code added to the key read history data. Therefore, illegal use of the key by altering the key read history data is avoided.

According to a tenth aspect of the present invention, in the key storage device of the seventh aspect, the key read history recording means has a predetermined storage capacity, and the key read authorization means does not authorize the external device to read the decoding key when the key read history data has reached the storage capacity of the key read history recording means. Therefore, an upper bound is set in access to the key, whereby the number of times the key is illegally used is limited.

According to an eleventh aspect of the present invention, there is provided a data player for reading data encrypted by a decoding key from a digital medium, and playing the data. This data player comprises key obtaining means for obtaining the decoding key for decoding the encrypted data, from a key storage

unit which stores the decoding key; decoding means for decoding the encrypted data obtained from the digital medium, by using the decoding key; data embedding means for embedding data in the data decoded by the decoding means; and device ID code storage means for storing the device ID code of this data player. The decoding key is obtained by the key obtaining means, and a key read time at which a request to read the decoding key was made and the device ID code of the data player are embedded in the decoded data by the data embedding means. Therefore, the key read time data and the device ID code of the data player, which are embedded in the decoded data, can be used to specify an illegal user.

According to a twelfth aspect of the present invention, in the data player of the eleventh aspect, the key obtaining means reads the ID code of the key storage unit which stores the decoding key, together with the decoding key, from the key storage unit, and the data embedding means further embeds the ID code of the key storage unit in the decoded data. Since the ID code of the key storage unit is also embedded in the decoded data, the data for specifying the illegal user is increased.

According to a thirteenth aspect of the present invention, in the data player of the eleventh or twelfth aspect, the data embedding means comprises sequence generation means for converting a pattern to be embedded into a sequence to be embedded in each video frame, and embedding means for embedding

the sequence in each video frame by watermarking. The sequence generation means converts the pattern to be embedded into the sequence to be embedded such that short-period patterns and a long-period pattern are mixed in the sequence, the short-period patterns are obtained by dividing the pattern to be embedded according to the number of bits to be embedded in each frame and embedding the bits in each frame, and the long-period pattern is obtained by dividing the pattern to be embedded, bit by bit, and embedding the divided bits over plural frames which are plural times as many as the number into which the pattern to be embedded is divided. Therefore, the key read time data or the ID code of the key storage unit is converted into a bit sequence which is resistive to alteration and then embedded in the decoded data, and the embedded data can be used to specify an illegal user.

According to a fourteenth aspect of the present invention, in the data player of the thirteenth aspect, the key obtaining means generates a key read history signal including the key read time and the device ID code of this data player, and transmits this signal to the key storage unit which stores the decoding key. Therefore, key read history data including the same data as the embedded data is formed.

According to a fifteenth aspect of the present invention, there is provided a digital contents player for reading data encrypted by a decoding key from a digital medium, and playing the data. This digital contents player comprises key storage

means for storing the decoding key for decoding the encrypted data; and data playback means for reading the decoding key from the key storage means, and playing the data using the decoding key. The data playback means and the key storage means are removable from each other. When the data playback means reads the decoding key, the key storage means records key read history data including a device ID code of this digital contents player and a key read time when a request to read the decoding key was made. The data playback means embeds the key read time and the device ID code in the data played with the decoding key. Therefore, the key read time data and the device ID code of the digital contents player can be embedded in the decoded data.

According to a sixteenth aspect of the present invention, in the digital contents player of the fifteenth aspect, the data to be embedded is converted into a sequence to be embedded in each video frame, and then embedded by watermarking. The sequence to be embedded is a mixture of short-period patterns and a long-period pattern, and the short-period patterns are obtained by dividing the pattern to be embedded according to the number of bits to be embedded in each frame and embedding the bits in each frame, and the long-period pattern is obtained by dividing the pattern to be embedded, bit by bit, and embedding the divided bits over plural frames which are plural times as many as the number into which the pattern to be embedded is divided. Therefore, the key read time data or the device ID code of the

digital contents player is converted into a bit sequence resistive to alteration, and embedded in the decoded data.

According to a seventeenth aspect of the present invention, there is provided a key read history recording method comprising: recording available period data which is the available period for reading a decoding key for decoding encrypted data; recording, as a key nonuse period, a difference between a key read time when a request to read the decoding key was made and a time which has been recorded at a time that is previous and nearest to the key read time; recording key read history data including the key read time and the device ID code of a data player; and recording the time when use of the decoding key has ended, as an end-of-key-use time. Therefore, the time data is prevented from going backward, whereby illegal use of the key is avoided.

According to an eighteenth aspect of the present invention, there is provided a data embedding apparatus comprising sequence generation means for converting a pattern to be embedded into a sequence to be embedded in each video frame, and embedding means for embedding the sequence in each video frame by watermarking. The sequence generation means converts the pattern to be embedded into the sequence to be embedded in which short-period patterns and a long-period pattern are mixed, the short-period patterns are obtained by dividing the pattern to be embedded according to the number of bits to be embedded in each frame and embedding the bits in each frame, and the long-period pattern is obtained by

According to a nineteenth aspect of the present invention, there is provided a data embedding apparatus comprising real time measuring means for outputting real time data which specifies the present time, and data embedding means for embedding the real time data in video/audio data. Therefore, the video/audio signal which can specify the time data is output, and an illegal user can be specified according to the time data.

According to a twenty-first aspect of the present invention, there is provided a data embedding apparatus comprising real position measuring means for outputting real position data which specifies the present physical position, and data embedding means

for embedding the real position data in video/audio data.

Therefore, the video/audio signal which can specify the position data is output, and an illegal user can be specified according to the position data.

According to a twenty-second aspect of the present invention, in the data embedding apparatus of the twenty-first aspect, the data embedding means embeds the real position data at the time when the video/audio data is input to this apparatus, in the video/audio data which is input in the visible/audible state to this apparatus. Therefore, the video/audio signal which can specify the position data at the time when an illegality was performed is output, and the illegal user can be specified according to the position data.

According to a twenty-third aspect of the present invention, there is provided a data embedding method comprising a real time measuring step of outputting real time data which specifies the present time, and a data embedding step of embedding the real time data in video/audio data. Therefore, the video/audio signal which can specify the time data is output, and an illegal user can be specified according to the time data.

According to a twenty-fourth aspect of the present invention, in the data embedding method of the twenty-third aspect, the real time data at the time when the video/audio data is input, is embedded in the video/audio data which is input in the visible/audible state. Therefore, the video/audio signal which

09640783.081800

can specify the time data at the time when an illegality was performed is output, and the illegal user can be specified according to the time data.

According to a twenty-fifth aspect of the present invention, there is provided a data embedding method comprising a real position measuring step of outputting real position data which specifies the present position, and a data embedding step of embedding the real position data in video/audio data. Therefore, the video/audio signal which can specify the position data is output, and an illegal user can be specified according to the position data.

According to a twenty-sixth aspect of the present invention, in the data embedding method of the twenty-fifth aspect, the real position data at the time when the video/audio data is input, is embedded in the video/audio data which is input in the visible/audible state. Therefore, the video/audio signal which can specify the position data at the time when an illegality was performed, and the illegal user can be specified according to the position data.

According to a twenty-seventh aspect of the present invention, there is provided an embedded data detection apparatus for detecting embedded data from playback data in which the data is embedded by a data embedding apparatus. The data embedding apparatus comprises sequence generation means for generating a sequence in which short-period patterns and a long-period pattern

are mixed, the short-period patterns being obtained by dividing the pattern to be embedded according to the number of bits to be embedded in each frame and embedding the bits in each frame, and the long-period pattern being obtained by dividing the pattern to be embedded, bit by bit, and embedding the divided bits over plural frames which are plural times as many as the number into which the pattern to be embedded is divided; and data embedding means for embedding the sequence in each video frame by watermarking. The embedded data detection apparatus comprises intra-frame embedded data detection means for detecting the embedded pattern from each video frame; short-period embedded pattern detection means for calculating the embedded pattern from the embedded pattern detected by the intra-frame embedded data detection means, with reference to short-circuit embedded bits; and long-period embedded pattern detection means for calculating the embedded pattern with reference to long-period embedded bits. Therefore, this apparatus can detect the embedded data which is embedded by using the short-period patterns and the long-period pattern and is resistive to alteration.

According to a twenty-eighth aspect of the present invention, there is provided an embedded data confirming method comprising: detecting embedded data from visible/audible data in which real time data that can specify the present time, real position data that can specify the present position, or a device ID code of a device for playing the visible/audible data is embedded; and

collating the detected data with a data base containing the history of the embedded data. Therefore, the detected data can be collated with the history data base, whereby an illegal user is traced with higher efficiency.

According to a thirtieth aspect of the present invention, there is provided a playback system comprising a data output unit for outputting data, and a data player. The data player comprises decoding means for decoding input data to video/audio data which is visible or audible, real time measuring means for outputting real time data which can specify the present time, and data embedding means for embedding the real time data in the video/audio data. The real time data measured by the real time measuring means at the time when the data player plays the input data is embedded in the video/audio data. Therefore, the time data at the time when an illegality was performed can be embedded in the decoded video/audio signal, and an illegal user can be specified according to the embedded time data.

According to a thirty-first aspect of the present invention, the playback system of the thirtieth aspect comprises one piece of the real time measuring means, and at least one piece of the data output unit. Therefore, in the system having plural players, the time data embedded in the video/audio signal can be used to specify an illegal user. Further, the time data is prevented from varying between the plural players, and the number of lines used for transmission is reduced.

According to a thirty-second aspect of the present invention, there is provided a playback system comprising a data output unit for outputting data, and a data player. The data player comprising decoding means for decoding input data to video/audio data which is visible or audible, real position measuring means for outputting real position data which can specify the present position, and data embedding means for embedding the real position data in the video/audio data. The real position data measured by the real position measuring means at the time when the data player plays the input data is embedded in the video/audio data. Therefore, the position data at the time when an illegality was performed can be embedded in the decoded video/audio signal, and an illegal user can be specified according to the embedded position data.

According to a thirty-third aspect of the present invention, the playback system of the thirty-second aspect comprises one piece of the real position measuring means, and at least one piece of the data output unit. Therefore, in the system having plural players, the position data embedded in the video/audio signal can be used to specify an illegal user. Further, the position data is prevented from varying between the plural players, and the number of lines used for transmission is reduced.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a block diagram illustrating an example of a data player according to a first embodiment of the present

invention.

Figure 2 is a flowchart illustrating an example of operation of the data player according to the first embodiment.

Figure 3 is a block diagram for explaining the case where the data player according to the first embodiment is judged as an illegal one.

Figure 4 is a block diagram illustrating a an example of a system including a data player and a key storage unit according to a second embodiment of the present invention.

Figure 5 is a flowchart illustrating an example of operation of the system according to the second embodiment in the case where the data player and the key storage unit perform playback of data.

Figure 6 is a diagram illustrating an example of written history data according to the second embodiment.

Figure 7 is a flowchart illustrating the procedure of writing the history data according to the second embodiment.

Figure 8 is a diagram illustrating a watermark embedding apparatus and an embedded data detection apparatus according to the second embodiment.

Figure 9 is a diagram illustrating pattern sequences to be embedded in frames, as the result of watermarking according to the second embodiment.

Figure 10 is a diagram illustrating an example of a device to specify an illegal device, an illegal key storage unit, or the

time when an illegal act was carried out, by using the recorded history data according to the second embodiment.

Figure 11 is a diagram illustrating a data embedding unit according to a third embodiment of the present invention.

Figure 12 is a diagram illustrating a construction for detecting the embedded data according to the third embodiment.

Figure 13 is a diagram illustrating a playback system according to a fourth embodiment of the present invention.

Figure 14 is a diagram illustrating a playback system having a plurality of players, according to the fourth embodiment.

Figure 15 is a diagram illustrating an example of a playback system according to a fifth embodiment of the invention.

Figure 16 is a diagram illustrating another example of a playback system according to the fifth embodiment.

Figure 17 is a diagram illustrating still another example of a playback system according to the fifth embodiment.

Figure 18 is a diagram illustrating a conventional data player.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[Embodiment 1]

Hereinafter, a first embodiment of the present invention corresponding to Claims 1 to 6 will be described with reference to figures 1 to 3.

Initially, the construction of a data player according to the first embodiment will be described with reference to figure 1.

05640783-081800

Figure 1 is a block diagram illustrating an example of a data player according to the first embodiment.

In figure 1, reference numeral 10 designates a key storage unit, 100 designates a DVD player (data player), and 20 designates a DVD (digital medium). The key storage unit 10 comprises a controller 11 and a key storage 12 in which a contents key decoding key (decoding key) is stored. The contents key decoding key is a key for decoding an encrypted contents key 21 recorded on the DVD 20 to obtain a contents key. The controller 11 performs mutual authentication with the DVD player 100, and permits the DVD player 100 to read the contents key decoding key. The DVD player 100 comprises a controller 101 for performing mutual authentication with the key storage unit 10 to receive key read permission, a contents key decoding key holder 102 (key holder) for holding the contents key decoding key which is read from the key storage unit 10, an encrypted contents key decoder 103 for decoding the encrypted contents key, a reader 104 for reading the contents or the like from the DVD 20, an encrypted contents decoder 105 for decoding the encrypted contents, a playback unit 106 for playing the decoded data, a signal output unit 107 for outputting the data played by the playback unit 106, and a user operation input unit 108 for sending an instruction from the user to the controller 101. The DVD 20 contains the encrypted contents key 21 and the encrypted contents 22. The encrypted contents 22 recorded on the DVD 20

09640703-091900

Initially, when the DVD player 100 is instructed by the user through the user operation input unit 108 so as to play the contents 22 on the DVD 20 (step S100), the DVD player 100 communicates with the controller 11 of the key storage unit 10 by using the controller 101 to make mutual authentication, and is verified as to whether it is eligible to play the contents recorded in the DVD 20 or not (step S101). When the controller 11 of the key storage unit 10 verifies that the DVD player 100 is eligible for playback and permits the DVD player 100 to read the contents key decoding key stored in the key storage 12 of the key storage unit 10 (step S102), the DVD player obtains the contents key decoding key from the key storage 12 and stores it in the contents key decoding key holder 102 (step S104). On the other hand, when the controller 11 of the key storage unit 10 does not verify that the DVD player 100 is eligible for playback in step

S101, the DVD player 100 is not permitted to read the contents key decoding key, and the process is halted in step S103.

The DVD player 100, which has received the contents key decoding key, obtains the encrypted contents key 21 from the DVD 20 by using the reader 104, and decodes the encrypted contents key 21 obtained from the DVD, with the contents key decoding key which has been stored in the contents key decoding key holder 102, by using the decoder 103, thereby obtaining the contents key (step S105). Next, the DVD player 100 obtains the encrypted contents 22 using the reader 104, and decodes the encrypted contents 22 with the contents key which has been decoded by the contents key decoding key, by using the decoder 105, thereby obtaining plaintext contents.

Thereafter, in step S107, the DVD player 100 plays the obtained plaintext contents by using the player 106, and outputs a signal from the signal output unit 107. While the contents in the DVD 20 are read and played by the reader 104 and the player 106 which are controlled by the controller 101, the player 106 continuously checks whether there is a change in the playback state of the DVD 20 (step S108), and when the playback state has changed, the player 106 posts the playback state to the controller 101. When the controller 101 conforms that the playback state has become "STOP STATE", the controller 101 instructs the contents key decoding key holder 102 to discard the contents key decoding key (step S109), and the consecutive

operation is ended (step S110). The "STOP STATE" indicates that the operation of the DVD player 100 is in the stopped state. When it is not confirmed that the playback state has become "STOP STATE" in step S108, the player 106 checks whether there is an instruction from the user (step S111). When there is no instruction from the user, the player 106 continues to monitor the playback state. When there is an instruction from the user, the player 106 operates according to the instruction of the user (step S112). Step S112 is followed by step S108 to repeat the operation from checking the playback state.

In the above-described operation, the DVD player 100 must be authenticated by the controller 11 of the external key storage unit 10 as to whether it is eligible to play the contents on the DVD 20 or not, every time it starts playback of the contents on the DVD 20.

Next, a description will be given of the case where the DVD player 100 is judged as being an illegal player in the mutual authentication between the key storage unit 10a and the DVD player 100, with reference to figure 3.

Figure 3 is a block diagram illustrating key storage units, DVDs, and a DVD player in the case where the DVD layer is judged as being an illegal player.

In figure 3, 10b denotes a key storage unit Mb different from the key storage unit Ma10a. The key storage unit Mb10b comprises a key storage 12a which contains a contents key

In the DVD player 100, two DVDs Da23 and Db26, and two key storage units Ma10a and Mb10b which are constructed as described above, the key storage unit Ma10a containing the contents key decoding key KKa is distributed together with the DVD Da23, and it is withdrawn at the appropriate time. The DVD player 100 plays the contents 25 in the DVD Da23 by using the DVD Da23 and the key storage unit 10a.

Now it is assumed that the DVD player 100 is judged as an illegal player for the reason that a pirated DVD copied with this DVD player 100 has been discovered. Further, it is assumed that the DVD Db26, which contains the contents encrypted with the contents key Kb encrypted with the contents key decoding key KKa

included in the key storage unit Mb10b, is produced, and the contents key decoding key KKa is stored in the key storage unit Mb10b to be distributed together with the DVD Db26. The key storage unit Mb10b will be withdrawn at the appropriate time like the key storage unit Ma10a. The controller 11b in the key storage unit Mb10b is altered so that it can recognize the DVD player 100 as an illegal player. Thereby, the key storage unit Mb10b does not transmit the contents key decoding key KKa any more to the DVD player 100 which is judged as an illegal player while it transmits the key KKa to other normal DVD players (not shown) as ever.

Thus, the DVD player 100 regarded as an illegal player cannot play DVDs which will be fabricated after the DVD Db26.

As described above, according to the first embodiment, the contents key decoding key, which has been obtained from the key storage 12 of the key storage unit 10 and stored in the contents key decoding key holder 102 of the DVD player 100, is discarded when the playback state becomes "STOP STATE", and the contents key decoding key is not transmitted to the DVD player which is regarded as an illegal DVD player in mutual authentication between the key storage unit 10 and the DVD player. Thereby, the contents in the DVD is prevented from being played by the illegal DVD player.

While in this first embodiment DVDs are used as digital media containing encrypted contents, other digital media may be

used.

Further, while in this first embodiment the DVD player 100 requires two keys, the contents key decoding key and the contents key, for decoding the encrypted contents, it is not necessary to use two keys for encryption. Three or more keys may be used for encryption, and one or more of them may be possessed by the key storage unit 10 outside the DVD player 100. Alternatively, one key may be used for encryption, and the key may be possessed by the external key storage unit 10.

Further, while in this first embodiment the decoding key obtained from the outside is discarded when the playback state of the DVD player 100 becomes "STOP STATE", the decoding key may be discarded according to any other playback state of the DVD 20.

[Embodiment 2]

Hereinafter, a second embodiment of the present invention corresponding to Claims 7 to 18, 21, 27 and 29 will be described with reference to figures 4 to 9.

Initially, a description will be given of a system including a data player and a key storage unit according to the second embodiment of the invention, with reference to figure 4.

Figure 4 is a block diagram illustrating a system including a data player and a key storage unit according to the second embodiment. The system shown in figure 4 comprises a key management unit 50 for generating a player key (decoding key) for each data player; a contents key encryption unit 51 for

Hereinafter, the internal structures of the key storage nit
40 and the data player 110 will be described in more detail..

The key storage unit 40 comprises a controller 41 for controlling the key storage unit 40; a player key storage (decoding key storage) 42 for storing the player key fabricated by the key management unit 50; an available period storage 43 for storing the available period of the player key; a history data storage (key read history storage) 44 for storing the read history when the player key is read from the key storage unit 40; a contents ID code storage 45 for storing the ID code of the encrypted contents 32 recorded on the recording medium 30; a time

data storage 46 for storing the time data transmitted from the data player 110; a player ID code storage 48 for storing the ID code of the storage unit 40; and a key-storage-to-player key storage 49 for storing a key used for encryption or decoding when performing encrypted communication between the key storage unit 40 and the data player 110.

The data player 110 comprises a controller 111 for controlling the data player 110; a player key storage 112 for storing the player key read from the key storage unit 40; a key decoding unit (decoding key obtaining unit) 113 for reading the encrypted contents key 31 from the recording medium 30 and decoding it; a playback unit (decoding unit) 114 for decoding and playing the encrypted contents data 32 included in the recording medium 30, by using the decoded contents key; a contents ID code storage 115 for storing the ID code of the encrypted contents 32 in the recording medium 30; a key receipt time storage 116 for storing the time data from the clock 53; a player ID code storage (device ID code storage) 117 for storing the ID code of the data player 110; a key storage ID code storage 118 for storing the ID code of the key storage unit 40 from which the player key is read; a key-storage-to-player key storage 119 for storing a key used when performing encrypted communication between the key storage unit 40 and the data player 110; and a watermark embedding unit (data embedding unit) 120 for embedding an electronic watermark in the data played by the playback unit 114.

09540783 081800

Next, the operation of the system including the data player 110 and the key storage unit 40 will be described with respect to the process of recording the encrypted contents key 31 and the encrypted contents 32 on the recording medium 30 and the process of playing the encrypted contents 32 on the recording medium 30.

Figure 5 is a flowchart for explaining the operation of the system when playing the encrypted contents 32 on the recording medium 30.

Initially, a description will be given of the process of recording the encrypted contents key 31 and the encrypted contents 32 on the recording medium 30.

In the key storage unit 40, the key management unit 50 generates a player key of the data player 110, stores the player key in the player key storage 42, and writes the available period of the player key in the available period storage 43. Further, the key management unit 50 sends the player key and its available period (key read available period data) to a writer (not shown) which writes contents data such as a movie in the recording medium 30. The contents key used for encrypting the contents data in the data encryption unit 52 is encrypted with the player key in the key encryption unit 51. The encrypted contents data 32 and the encrypted contents key 31 so obtained are recorded on the recording medium 30. In this way, there is generated the recording medium 30 containing the encrypted contents data 32 obtained by encrypting the contents data with the contents key,

09540783-081800

and the encrypted contents key 31 obtained by encrypting the contents key with the player key. Since these processes are performed when generating a movie title or the like of general DVD video, only the outlines of the processes are described above. However, in order to realize distribution to plural data players, usually plural contents keys encrypted with plural player keys corresponding to the plural destinations (data players) are recorded (not shown).

Next, a description will be given of the operations of the key storage unit 40 and the data player 110 when playing the encrypted contents data 32 on the recording medium 30 so obtained, according to the flowchart of figure 5.

When the recording medium 30 is played by the data player 110, initially, the controller 111 reads the contents ID code of the recording medium 30 and stores it in the contents ID code storage 115 (step S201). Then, in step S202, the controller 111 takes the present time data from the clock 52 and stores it as the key read time in the time data storage 116. Next, in step S203, a key request command (a signal requesting the player key) is transmitted together with the key read time stored in the time data storage 116, the contents ID code stored in the contents ID code storage 115, and the player ID code (device ID code) of the data player 110 which is stored in the player ID code storage 117, to the controller 41 of the key storage unit 40. These data to be transmitted between the controller 111 of the data player 110

and the controller 41 of the key storage unit 40 are encrypted with the key-storage-to-player key which is common to the both units and stored in the key-storage-to-player key storages 49 and 119. Further, decoding of the encrypted data can be performed software-wise in the controllers 41 and 111.

Next, the controller 41 of the key storage unit 40 stores the key read time, the contents ID code, and the player ID code, which have been transmitted from the data player 110, in the time data storage 46, the contents ID code storage 45, and the player ID code storage 47, respectively. In step S204, the latest time which has already been stored in the history data storage 44 is compared with the key read time stored in the time data storage 46. When the key read time is later than the latest time, it is decided that the process has succeeded. Otherwise, playback of the recording medium 30 is immediately stopped by issuing a process stop message or the like to the data player 110 in step S205.

Next, in step S206, the controller 41 confirms as to whether the key read time is within the available period of the player key which is stored in the available time storage 43. When the key read time is within the available period, it is decided that the process has succeeded. Otherwise, playback is immediately stopped in step S205. Then, in step S207, those data stored in the time data storage 46, the contents ID code storage 45, and the player ID code storage 47 are recorded as the history data in

the history data storage 44. If writing of these data fails, the control returns to step S205 to stop the playback immediately.

When the three processes in steps S204, S206, and S207 have succeeded, the control proceeds to step S208 wherein the controller 41 of the key storage unit 40 transmits the player key stored in the player key storage 42 to the controller 111 of the data player 110, together with the key storage ID code of the key storage unit 40 which is stored in the key storage ID code storage 48. In step S209, the controller 111 takes the player key from the key storage unit 40, and stores the player key in the player key storage 112, and the key storage ID code of the key storage unit 40 in the key storage ID code storage 118.

In the data player 110, the player key so obtained from the key storage unit 40 is input to the key decoding unit 113. In step S210, the controller 111 reads the encrypted contents key 31 from the recording medium 30. In step S211, the encrypted contents key 31 is decoded to obtain the contents key. This contents key is input to the playback unit 114. In step S212, the controller 111 reads the encrypted contents data 32 from the recording medium 30, and the encrypted contents data 32 is decoded using the contents key. Thereafter, in step S213, playback is carried out according to the contents of data. That is, when the data to be played is video data compressed in MPEG2 format, the video data is decoded by MPEG2 decoding to transform the data to a video signal. Thereafter, in step S214, the player

ID code, the key storage ID code, or the key read time (the time at which the player key read request was made) which are stored in the player ID code storage 117, the key storage ID coded storage 118, and the time data storage 116, respectively, is embedded as a watermark in the data output from the playback unit 114 by the watermark embedding unit 120, and the watermark-embedded data is output to the outside of the data player 110.

After playback of the contents data from the recording medium 30 is completed, in step S215 the controller 111 of the data player 110 transmits an end-of-key-use time at which use of the player key is ended, from the clock 53 to the controller 41 of the key storage unit 40. In step S216, the controller 41 of the key storage unit 40 stores the end-of-key-use time in the history data storage unit 44, whereby playback is ended.

Hereinafter, the process of writing the history data (steps S207 and S216) will be described in more detail with reference to figures 6 and 7.

Figure 6 is a table showing an example of history data written in the history data storage 44, and figure 7 is a flowchart for explaining the process of writing the history data. In the first row of the table of figure 6, the start time of the available period of the key has already been written.

Initially, in step S302, writing of the key nonuse period is performed as follows. That is, in the first column of the row next to the last row which has been written most recently, a

difference between the time data in the leftmost column of the last row and the key read time (the time at which the player key was requested) which is stored in the time data storage 46 is written as the key nonuse period. In the second column of the same row, the time data in the leftmost column of the last row is written. In the third column of the same row, the key read time is written. Then, hashing is carried out to detect alteration on the data in the just written row and in the previous row, and the result is written in the fourth column.

Next, in step S303, writing of the start time (start time 1) is performed as follows. That is, in the row next to the row which has been written in step S302, the key read time is written in the first column, the player ID code is written in the second column, and the contents ID code is written in the third column. Thereafter, hashing is carried out to detect alteration on the data in the just written row and in the previous row, and the result is written in the fourth column.

Thereafter, as already described with respect to steps S215 and S216 in figure 5, the controller 111 of the data player 110 transmits the time data obtained from the clock 53, as a signal indicating that the use of the player key is ended, to the key storage unit 40. On receipt of the time data, in step S304, the controller 41 of the key storage unit 40 writes the end-of-key-use time in the row next to the row which has been written in step S303. More specifically, the end-of-key-use time supplied

from the data player 110 is written in the first column, the player ID code is written in the second column, and the contents ID code is written in the third column, and furthermore, hashing is performed to detect alteration on the data in the just written row and in the previous row, and the result is written in the fourth column.

According to the process steps described above, every time the history data is written, it is connected with the previous history data by the alteration detection code. So, even when illegal history data is inserted in the history data shown in figure 6, the position of the illegal history data can be easily detected as long as the method of generating the alteration detection code is not discovered. Further, the latest time data is written in the first column in the last row of the written history data, and the following time data is always later than this time. Otherwise, the process is stopped and no key is distributed as described with respect to step S204 in figure 5, whereby the illegality of setting the time data backward is avoided.

Further, when the end-of-key-use time is also written as the history data in addition to the player key read time, the time of the clock 53 can be advanced by at least the playback time.

Further, the capacity of the history data storage 44 of the key storage unit 40 may be limited. In this case, when the storage 44 is filled up with the history data, since no more

history data is written in the storage 44, it is decided that the process fails and the key distribution is stopped as described for step S207 in figure 5. Therefore, the upper bound of the number of key receipt times can be set by limiting the storage capacity.

Next, a description will be given of the watermark embedding method (step S214 in figure 5) and a method for detecting the embedded watermark, with reference to figures 8 to 10.

Figure 8 is a diagram for explaining the structure of the watermark embedding unit 120 and the structure of a watermark detection unit. Figure 9 is a diagram for explaining pattern sequences embedded in frames as the result of the watermark embedding process. Figure 10 is a diagram for explaining the case where the history data written as shown in figure 6 is used for reading the embedded data.

Initially, the structure of the watermark embedding unit 120 will be described with reference to figure 8.

In figure 8, a sequence generator 121 converts data to be embedded into a pattern sequence to be embedded in video frames. A watermark embedding unit 122 embeds the pattern sequence generated by the sequence generator 121, frame by frame, thereby converting the input data to watermark-embedded data. Further, watermark detector 125 detects the pattern embedded in the frames by the watermark embedding unit 122. A watermark short-period embedded pattern detector 123 and a watermark long-period

embedded pattern detector 124 detect the embedded data from the pattern detected by the watermark detector 125.

The operation of the watermark embedding unit will be described with reference to figures 8 and 9. As a pattern to be embedded, a bit pattern including the player ID code of the data player 110, the storage ID code of the key storage Unit 40, or the time data is inputted to the sequence generator 121. In the sequence generator 121, the inputted bit pattern is converted to a pattern sequence to be embedded frame by frame, and transmitted to the watermark embedding unit 122. More specifically, in the sequence generator 121, the inputted bit pattern is divided into plural patterns according to the number of bits to be embedded in each frame, thereby providing plural patterns to be embedded in the respective frames. For example, in the case where the bit pattern to be embedded has 8 bytes and this pattern is to be embedded by 4 bits per frame as shown in figure 9, when the pattern to be embedded is "0110010111001010", "65ca" based on hexadecimal is embedded in the first four frames. Next, the first bit value "0" of the embedded pattern is input to the same number of frames as described above. That is, the first bit value of the embedded pattern is embedded for a period equivalent to the frame length as long as the previously embedded pattern. For example, when the value to be embedded is "0", "0" is output for a period of 4 frames. When it is "1", "FFFF" based on hexadecimal is output for a period of 4 frames. Next, the

The watermark detector 125 detects the embedded pattern frame by frame. While in this second embodiment the original image is used as a reference image, the original image is not referred to when an embedding method that can detect the embedded pattern without referring to the original image is employed. The result of the frame-by-frame detection of the embedded pattern is transmitted to the short-period embedded pattern detector 123 and the long-period embedded pattern detector 124. The short-period embedded pattern detector 123 repeatedly compares the results of detection on the bit sequences embedded in short periods to detect, for each bit, the bit value which appears most frequently. The long-period embedded pattern detector 124 obtains the result of detection in the period of embedding each bit, for example, whether all of the bits in the frames from the fifth frame to the eighth frame are "1" or "0". When all of the detected values are not equal, the bit value ("1" or "0") detected in larger number is selected.

In the above-described short-period embedded pattern detection, the embedded data can be decoded with a small number

of frames. On the other hand, in the long-period embedded pattern detection, since bit-by-bit detection is carried out over a long period, correct values can be obtained by majority decision even when some watermarks are altered, whereby the embedded patterns can be obtained by performing bit-by-bit detection for all of the embedded patterns.

When data is embedded in short periods, since the embedded data appears in every several frames in the video, the embedded data can be detected even when the video data is edited, but this method is not resistant to alteration such as frame extraction. On the other hand, when data is embedded over a long period, the embedded pattern cannot be detected unless the video data is detected for the long period, but this method is resistant to alteration such as frame extraction. Therefore, by using the two embedding methods together, an embedding method resistant to alteration and edition is realized by compensating each other's weak point.

The manner of using the short-period embedding method and the long-period embedding method together is not restricted to that described for the second embodiment. For example, assuming that four bits are embedded in one frame, three bits of them may be used for short-period embedding while using the remaining one bit for the long-period embedding.

Next, a description will be given of the case where the history data written as shown in figure 6 is utilized for reading

09640783-081800

Figure 10 is a diagram illustrating the construction of a device for specifying an illegal player, an illegal key storage unit, or the time at which an illegal act was carried out.

There is the possibility that the embedded data detected by the watermark detector 131 could have been altered by an illegal user. That is, it is supposed that the illegal user has tried to delete or alter the embedded data to escape from pursuit according to the embedded data. As the result, the original data may be defected by removing the embedded part, or part of the data may be wrongly detected due to alteration by embedding random data in the original data. As long as at least one of the embedded data is detected correctly, the remaining data can be restored by retrieving the history data base wherein the history data withdrawn from the history data storage 44 of the key

As described above, according to the data player 110 of this second embodiment, the player key read history is stored in the key storage unit 40. Therefore, even when someone tries to make a false declaration of the present time in confirming the available period or the like, since the time to receive the player key is always in the clock advancing direction, the illegal user cannot play the data over the playback time in which the data is continuously played.

Further, writing of history which cannot be easily altered is realized by giving hash values to the history:

Furthermore, according to the second embodiment, the precision in detecting the embedded data can be increased with the history data written in the history data storage 44 of the

key storage unit 40. Further, collation of the history data with the detected embedded data can provide certain evidence of illegality.

Moreover, since two data embedding patterns, i.e., the short-period pattern and the long-period pattern, are used together, a data embedding method resistant to alteration is realized.

In this second embodiment, the key's available period and the like are checked when the key storage unit 40 reads the key. However, as long as the data player 110 is guaranteed for anti-tamper characteristics and is not modified, the data player 110 may receive the key data and the history data by encrypted communication from the key storage unit 40 to check the available period and the like on the basis of these data. In this case, also the history data may be generated in the data player 110 and transmitted to the key storage unit 40 by encrypted communication to be stored therein.

Further, when the time data is taken from the history data in checking the previous access time in step S205 of figure 5, it may be checked using the hash values shown in figure 6 as to whether the history data itself was altered or not, whereby the higher safety is achieved. That is, alteration check is realized by performing the same process as calculating the hash value from the history data and then checking whether the result matches the hash value or not.

[Embodiment 3]

Initially, the process of embedding data in a video/audio signal will be described with reference to figure 11.

Next, the operation of the data embedding means so constructed will be described.

The data embedding means 220, to which a video/audio signal is input, embeds the following data in the video/audio signal: ID data for identifying a device, which is output from the ID storage means 223; real time data for specifying the present time, which is output from the real time measuring means 221; and real

General information	
Study	1995
Country	USA
Study type	Case-control
Study period	1990-1994
Study population	1000
Study design	Case-control
Study location	USA
Study objectives	To determine the risk factors for the development of the disease
Study hypotheses	H1: The risk of the disease is increased in the exposed group H2: The risk of the disease is decreased in the exposed group H3: The risk of the disease is not changed in the exposed group
Study results	OR = 1.5, 95% CI = 1.2-1.8 OR = 0.5, 95% CI = 0.3-0.8 OR = 1.0, 95% CI = 0.8-1.2
Study conclusions	The risk of the disease is increased in the exposed group
Study limitations	Recall bias, selection bias, confounding
Study strengths	Retrospective design, large sample size
Study references	1. Smith J, Jones K. 1995. The risk of the disease in the exposed group. <i>Journal of Epidemiology and Community Health</i> 49: 1-5. 2. Smith J, Jones K. 1996. The risk of the disease in the exposed group. <i>Journal of Epidemiology and Community Health</i> 50: 1-5.

General information	
Study	1995
Country	USA
Study type	Case-control
Study period	1990-1994
Study population	1000
Study design	Case-control
Study location	USA
Study objectives	To determine the risk factors for the development of the disease
Study hypotheses	H1: The risk of the disease is increased in the exposed group H2: The risk of the disease is decreased in the exposed group H3: The risk of the disease is not changed in the exposed group
Study results	OR = 1.5, 95% CI = 1.2-1.8 OR = 0.5, 95% CI = 0.3-0.8 OR = 1.0, 95% CI = 0.8-1.2
Study conclusions	The risk of the disease is increased in the exposed group
Study limitations	Recall bias, selection bias, confounding
Study strengths	Retrospective design, large sample size
Study references	1. Smith J, Jones K. 1995. The risk of the disease in the exposed group. <i>Journal of Epidemiology and Community Health</i> 49: 1-5. 2. Smith J, Jones K. 1996. The risk of the disease in the exposed group. <i>Journal of Epidemiology and Community Health</i> 50: 1-5.

General information	
Study	1995
Country	USA
Study type	Case-control
Study period	1990-1994
Study population	1000
Study design	Case-control
Study location	USA
Study objectives	To determine the risk factors for the development of the disease
Study hypotheses	H1: The risk of the disease is increased in the exposed group H2: The risk of the disease is decreased in the exposed group H3: The risk of the disease is not changed in the exposed group
Study results	OR = 1.5, 95% CI = 1.2-1.8 OR = 0.5, 95% CI = 0.3-0.8 OR = 1.0, 95% CI = 0.8-1.2
Study conclusions	The risk of the disease is increased in the exposed group
Study limitations	Recall bias, selection bias, confounding
Study strengths	Retrospective design, large sample size
Study references	1. Smith J, Jones K. 1995. The risk of the disease in the exposed group. <i>Journal of Epidemiology and Community Health</i> 49: 1-5. 2. Smith J, Jones K. 1996. The risk of the disease in the exposed group. <i>Journal of Epidemiology and Community Health</i> 50: 1-5.

from this date and time. When the real time measuring means 221 is applied to a system that can record the history of processing (in this case, playback) such as an electronic cinema, the real time data may be represented by the number of processing times.

Next, the real position measuring means 222 has an arbitrary construction which can measure its physical position to output real position data for specifying this position, such as a GPS (Global Positioning System). As the real position data, data in an arbitrary form which can specify a physical position; such as a combination of the latitude and the longitude, may be used.

To implement the real position measuring means 222, there is a method of measuring its physical position on the basis of a position reference signal supplied from the outside, and outputting it as real position data. As a typical example of this, there is a method according to the GPS. The GPS receives waves from plural navigation satellites with an antenna, calculates the distances from it to the satellites according to the arrival times of the waves by using a real position measuring means, and measures its position from the distances. The GPS has been practically used for a car navigation system or the like. As another example, there is a method according to GLONASS (Global Navigation Satellite System) using the same principle as that of the GPS. Further, there is another example according to DGPS (Differential GPS). The DGPS receives GPS compensation data through a FM wave and compensates the position according to the

09040783.081800

GPS, in addition to the operation of the GPS. Further, there is still another example according to PHS (Personal Handy Phone) measurement. The PHS measurement receives waves from three PHS base stations of higher field intensities, and measures its position on the basis of the positions of the base stations and the field intensities of the received signals.

The real position measuring means 222 is implemented by any of the above-mentioned examples or a combination of them.

However, the present invention is not restricted thereto. The real position measuring means 222 can be implemented by an arbitrary construction which receives, with an antenna, signals from plural satellites or fixed stations as reference position signals, and measures its physical position according to the reference position signals. As a method for measuring the physical position, there is an arbitrary means for calculating the position from the arrival times or intensities of waves from the outside. Further, the real position measuring means 222 may be combined with means for obtaining its precise position by using data for compensation which has been received separately through broadcasting, or data about the travel distance or direction of a mobile body such as a car or an airplane on which the real position measuring means 222 is mounted, or a map. Further, means for directly receiving position data from the server, or a combination of these means, may be used as long as the real position measuring means 222 can measure its physical

09640783-081300

The data embedding means 220 has an arbitrary construction for embedding the ID data, the real time data, and the real position data in a video/audio signal. This means is implemented by an arbitrary method for embedding data and, thereafter, detecting the embedded data. For example, assuming that the signal output from the decoding means 230 is a video signal, data can be multiplexed in the blanking period of the video signal. Further, an arbitrary means for embedding data in video or audio, which is known as watermarking, may be used.

The data embedding method using watermarking may employ replacement of pixels corresponding to data to be embedded. In this method, initially, at least one pixel is selected from each frame of video, based on the data to be embedded. For example, a number is calculated from the data, and a pixel in the position indicated by the number is selected. Next, the data of the selected pixel is replaced with the data calculated from the data of an adjacent pixel. When detecting the data, the replaced pixel can be detected by comparing the image in which the data is embedded with the image in which no data is embedded, i.e., the original image decoded from the stream. The data can be restored from the position of the detected pixel.

Another example of watermarking is described in, for example,

"Data Hiding Technique Supporting Watermarking", pp.149~162, Nikkei Electronics, February 24, 1997 (No. 683), and "Techniques for Data Hiding", written by W.Bender, D.Gruhl, N.Morimoto, A.Lu, IBM Systems Journal, Vol.35, Nos.3&4, 1996. In this method, two pixels (A_i, B_i) are selected from video by pseudo random numbers, and when the bit to be embedded is "1", the luminance level Y_{ai} of A_i is raised by d while the luminance level Y_{bi} of B_i is lowered by d . Inversely, when the bit to be embedded is "0", the luminance level of A_i is lowered by d while the luminance level of B_i is raised by d . The value of d is an integer from 1 to 5. By repeating these processes n times (usually, n is about 10,000), data is embedded in the video. When detecting the embedded data, two luminance levels in the same positions as described for the data embedding process, i.e., $(Y_{ai}+d, Y_{bi}-d)$ or $(Y_{ai}-d, Y_{bi}+d)$, are extracted from the video by the pseudo random numbers, and a difference between these points is calculated. These processes are repeated for each position by n times, and the average of the differences is obtained and, thereafter, it is decided that the embedded bit is "0" or "1" according to that the average is near to $+2d$ or $-2d$.

Besides the methods mentioned above, there are various kinds of data embedding methods, and an arbitrary method may be employed.

Next, the process of detecting the embedded data will be described with reference to figure 12.

In figure 12, reference numeral 280 denotes a data detection means, 281 denotes a collation means, and 282 denotes a data base. The data detection means 280 detects at least one of the ID data, the real time data, and the real position data which are embedded in the video/audio signal, and outputs the data. To be specific, the data detection means 280 detects the data embedded by the data embedding means 220 from difference data obtained by comparing the input video/audio signal with the video/audio signal in which the data has not yet been embedded. The detection method is not restricted to the above-mentioned one, and any method corresponding to the embedding process by the data embedding means 220 may be employed. For example, embedded data can be directly detected from a video signal in which the data is embedded in the blanking period. Further, when data is embedded in a video/audio signal by watermarking, the embedded data can be detected by comparing the data-embedded video/audio signal with

the video/audio signal in which the data has not yet been embedded. From these detected data, you can know the ID data of the player used for playback, the time when playback was carried out, and the physical position where playback was carried out. These data can be used for investigating the illegal player and its operator from the illegally used video/audio signal.

Further, in the data base 202, the ID of the operator of the player may be written in association with the ID data of the player, the time of the operation, and the place of the operation. In this case, the operator ID can be specified by the collation means 281. Such data base can be created according to reports from managers of data players in systems the operators of which can be specified, such as AV systems in electronic movie theaters or airplanes. The data base 282 and the collation means 281 can specify the operator more easily in a system which can construct the data base 282.

As described above, according to the third embodiment of the present invention, by mounting or using the data embedding means 220 on or together with a video/audio signal player, recorder, or editor, the device used for the process (i.e., playback, recording, or edition) and the time and place can be specified. Therefore, when the video/audio signal is illegally processed, the illegal use can be detected, i.e., the illegally used player and the time and place of the illegal use can be specified. For example, it is assumed that the data embedding means 220 is .

09640783-081800

Furthermore, according to the third embodiment, since the data for specifying the illegal person can be detected as well, the effect of dissuading people thinking of doing illegal acts is also expected.

Furthermore, while in this third embodiment a video/audio signal is adopted as the object of processing, the object may be

Furthermore, while in this third embodiment a video/audio signal is adopted as the object of processing, the object may be

only a video signal or an audio signal. Further, the object may be a video or audio signal compressed by MPEG. Furthermore, the object may be data of text or program. Also in these cases, the same effects as described above are achieved.

The ID storage means 223 may be implemented by a removable device such as an IC card, with the same effects as described above.

Further, while in this third embodiment data which can specify a device is used as ID data, data which can specify a company or a place relating to a device may be used as ID data, for example, a manufacturer of the device, a carrier using the device, a mobile body (airplane, bus, etc.) in which the device is used, a hall or movie theater in which the device is used. Alternatively, the ID of the user of the device may be used as ID data. The user ID may be stored in the ID storage means 223, or it may be input through an input means such as a keyboard or a remote controller. As described above, as ID data, any data for identifying a device itself, a carrier or place relating to the device, or a user of the device, may be employed, with the same effects as described above. Of course, a combination of these data may be used.

Further, while in this third embodiment the data embedding apparatus embeds the ID data, the real time data, and the real position data, the apparatus may be constructed so that it embeds arbitrary data relating to a device, person, company, or place

by/in which the processing was performed, with the same effects as described above.

While the data embedding apparatus of this third embodiment is constructed as shown in figure 11, it can be implemented by an arbitrary construction that performs the same operation as mentioned above. It is also possible to implement the data embedding apparatus by a combination of a CPU or processor with a program, which realizes the process of embedding some or all of the ID data, the real position data, and the real time data in a video/audio signal.

Further, the data embedding apparatus may be constructed so that the ID data, the real time data, and the real position data are encrypted when being embedded, and decoded when being detected. This construction makes alteration of these data difficult. Further, an arbitrary encryption technique such as authentication or signature makes alteration more difficult.

[Embodiment 4]

Hereinafter, a fourth embodiment of the present invention corresponding to Claims 30 and 32 will be described with reference to figures 13 and 14.

Figure 13 is a block diagram illustrating a playback system according to the fourth embodiment. In figure 13, 200 denotes a data player, 220 denotes a data embedding means, 210 denotes a control means for controlling the data player 200, 221 denotes a real time measuring means, 222 denotes a real position measuring

The stream output unit 240 outputs a stream like an MPEG-TS (Moving Picture Expert Group - Transport Stream) which is recorded on a recording medium or received by broadcasting. This stream is encrypted, and a key used for encryption is also encrypted and multiplexed in the stream. Since the data embedding means 220, the real time measuring means 221, and the real position measuring means 222 operate in the same way as described for the third embodiment and, therefore, repeated description is not necessary.

A stream outputted from the stream output unit 240 is input to the data player 200 and decoded by the decoding means 230. The decoding means 230 separates the encrypted key from the stream and outputs it. The encrypted key is decoded by the control means 210 and inputted to the decoding means 230 again. The decoding means 230 decodes the stream by using the key. Further, the decoding means 230 decodes the stream to obtain a visible/audible signal. That is, the decoding means 230 performs demultiplexing of the multiplexed stream, and decompression of the compressed stream to convert it into a visible/audible signal.

The signal outputted from the decoding means 230 is input to

As described above, in the signal played by the data player 200, the following data are embedded: the ID data for specifying the player 200, the real time data for specifying the time when the signal was played, and the real position data for specifying the place where the signal was played, and these data are detectable. Accordingly, when a recording medium, on which the signal played by the data player 200 is recorded without permission, is illegally sold or distributed, it is possible to specify the device, time, and place of the illegal recording, from the signal recorded on the recording medium.

To facilitate understanding, how the illegality is detected or avoided will be described hereinafter.

It is assumed that the playback system of this fourth embodiment is used for playing a movie on a mobile body such as an airplane or a bus. As an example of illegality, it is supposed that the movie is copied without permission by a working staff or a passenger. In this case, the playback system of this

fourth embodiment can specify the data of the device, time, and place of the illegal copying, from the illegally copied video/audio signal. Furthermore, it is possible to mark down the person who illegally copied the movie, according to the specified data and the boarding list of working stuffs and passengers. It is supposed that, as another example of illegality, someone carries out the playback system without permission and then performs illegal copying. In this case, the device carried out and used for the illegal copying, and the time and place when/where the illegal copying was performed, can be specified. Even when illegal copying is performed in an individual home, the device or the home by/in which the illegal copying was carried out.

Furthermore, the playback system of this fourth embodiment can detect the data which specifies a person who did an illegal act, and this will dissuade a person thinking of doing an illegal act from doing it actually.

While in this fourth embodiment the stream output unit 240 outputs an MPEG-ST, the stream output unit is not restricted thereto. Hereinafter, another example of the stream output unit 240 will be described.

The stream output unit 240 is an arbitrary device for outputting a digitized video signal, an audio signal, data, or a stream in which these are multiplexed. Further, the stream is a digital signal of an arbitrary format including video, audio,

Examples of the data output unit 240 for outputting the above-described streams are as follows: a digital broadcast tuner which receives a signal of satellite broadcasting or ground-wave broadcasting which is transmitted in a radio wave, and plays a stream from the received signal; a digital broadcast tuner which receives a signal of a cable TV transmitted through a cable such as a coaxial cable or an optical fiber, a retransmitted signal of satellite broadcasting or ground-wave broadcasting, or a signal of wire broadcasting, and plays a stream from the received signal; a data player which plays a stream from a signal recorded on recording media, for example, an optical disk such as a DVD or a CD (compact disk), a magneto-optical disk, a magnetic disk, a tape such as a digital VHS or DV, a hard disk, and a solid memory; a receiver which receives a signal transmitted through a telephone line, Ethernet, or a network such as ATM, and plays a stream from the received signal; and a PC (personal computer) or a processor which realizes the above-described functions. Of

a processor which realizes the above-described functions. Of

Further, the control means 210 may be implemented by a removable device such as an IC card, with the same effects as described above.

While in this fourth embodiment the data player 200 has both of the real time measuring means 221 and the real position measuring means 222, one of these means may be dispensed with.

[Embodiment 5]

Initially, the construction of a playback system according to this fifth embodiment will be described with reference to figure 15.

In this fifth embodiment, the real time measuring means 221 and the real position measuring means 222 are identical to those described for the third embodiment, and the stream output units 241, 242, and 243 have the same construction as that of the stream output unit 240 according to the fourth embodiment.

Further, each of the data players 204, 205, and 206 according to this fifth embodiment is different from the data

player 200 according to the fourth embodiment only in that it does not include the real time measuring means 221, and the real position measuring means 222, and receives real time data and real position data supplied from the outside.

The playback system so constructed provides the same effects as those provided by the playback system of the fourth embodiment. In addition, the number of the real time measuring means 221 and the real position measuring means 222 can be reduced, and the precision of real time data or real position data is prevented from varying amongst the data players.

Further, when each of the data players 204, 205, and 206 is constructed so that it performs playback only when correct real time data and correct real position data are input, undesired illegality or malfunction such that playback is performed without embedding the real time data and the real position data, is avoided.

Thereby, when the stream output units 241~243 and the data players 204~206 are stolen, playback by the stolen units is avoided. For example, when these units are lent to seats of an airplane or a bus, the respective units are set so that they perform playback only when the signals from the real time measuring means 221 and the real position measuring means 222 are supplied. Thereby, even when the lent units are carried out, these units cannot be used for playback, whereby illegal playback is avoided.

A method for controlling the data players 204, 205, and 206 so as to operate only when correct real time data and correct real position data are input, is implemented by an arbitrary construction. The simplest method is to make each data player perform playback only when the real time data and the real position data are input. Further, in order to increase the security, there is a method of adding error correction codes or encrypted signatures to the real time data and the real position data, or a method of performing encrypted authentication. Further, the security is also increased by a method of transmitting key data for decoding the stream, together with the real time data and the real position data. Further, these controls may be performed by the controlling means of the data player.

Next, another example of a playback system according to the fifth embodiment will be described with reference to figure 16.

Figure 16 is a block diagram illustrating a playback system having only one stream output unit.

In figure 16, a playback system is constituted such that a stream outputted from a stream output unit 240 is played by plural data players 204, 205 and 206. In this case, the stream, the real time data, and the real position data are multiplexed by a multiplexer 250 and, before the multiplexed stream and data is input to the data players 204, 205, and 206, it is separated into the stream, the real time data, and the real position data by

Another example of a playback system according to the fifth embodiment is shown in figure 17.

In figure 17, a decoding means 231 extracts the data indicating time or the like from the data embedded in the stream and outputs timing data, and a control means 211 transmits the timing data through a transmission means 271 of a control data transmission apparatus 270 to a key transmission means 272. The key transmission means 272 calculates the key transmission timing from the timing data, and outputs an encrypted key. The transmission means 271 transmits the encrypted key, the real time data outputted from the real time data measuring means 221, and the real position data outputted from the real position measuring means 222 to the control means 211 of the data player 207. The control means 211 generates a key from the encrypted key received, and outputs it to the decoding means 231. At the same time, the control means 211 outputs the received real time data and real position data to the data embedding means 220. In this construction, the data player 207 cannot obtain the key for decoding encryption and therefore cannot play the stream unless it receives the real time data and the real position data.

while in this fifth embodiment the playback system is

Fertilizer treatments		Control	
Rate	kg/ha	Rate	
0	0	0	0
100	100	0	0
200	200	0	0
300	300	0	0
400	400	0	0
500	500	0	0
600	600	0	0
700	700	0	0
800	800	0	0
900	900	0	0
1000	1000	0	0
1100	1100	0	0
1200	1200	0	0
1300	1300	0	0
1400	1400	0	0
1500	1500	0	0
1600	1600	0	0
1700	1700	0	0
1800	1800	0	0
1900	1900	0	0
2000	2000	0	0
2100	2100	0	0
2200	2200	0	0
2300	2300	0	0
2400	2400	0	0
2500	2500	0	0
2600	2600	0	0
2700	2700	0	0
2800	2800	0	0
2900	2900	0	0
3000	3000	0	0
3100	3100	0	0
3200	3200	0	0
3300	3300	0	0
3400	3400	0	0
3500	3500	0	0
3600	3600	0	0
3700	3700	0	0
3800	3800	0	0
3900	3900	0	0
4000	4000	0	0
4100	4100	0	0
4200	4200	0	0
4300	4300	0	0
4400	4400	0	0
4500	4500	0	0
4600	4600	0	0
4700	4700	0	0
4800	4800	0	0
4900	4900	0	0
5000	5000	0	0
5100	5100	0	0
5200	5200	0	0
5300	5300	0	0
5400	5400	0	0
5500	5500	0	0
5600	5600	0	0
5700	5700	0	0
5800	5800	0	0
5900	5900	0	0
6000	6000	0	0
6100	6100	0	0
6200	6200	0	0
6300	6300	0	0
6400	6400	0	0
6500	6500	0	0
6600	6600	0	0
6700	6700	0	0
6800	6800	0	0
6900	6900	0	0
7000	7000	0	0
7100	7100	0	0
7200	7200	0	0
7300	7300	0	0
7400	7400	0	0
7500	7500	0	0
7600	7600	0	0
7700	7700	0	0
7800	7800	0	0
7900	7900	0	0
8000	8000	0	0
8100	8100	0	0
8200	8200	0	0
8300	8300	0	0
8400	8400	0	0
8500	8500	0	0
8600	8600	0	0
8700	8700	0	0
8800	8800	0	0
8900	8900	0	0
9000	9000	0	0
9100	9100	0	0
9200	9200	0	0
9300	9300	0	0
9400	9400	0	0
9500	9500	0	0
9600	9600	0	0
9700	9700	0	0
9800	980		

WHAT IS CLAIMED IS:

1. A data player for reading contents encrypted by a decoding key from a digital medium, and playing the encrypted contents by using the decoding key which is stored in a key storage unit, said data player comprising:

key obtaining means for performing mutual authentication with the key storage unit to obtain the decoding key stored in the key storage unit;

key holding means for holding the decoding key;

playback state obtaining means for monitoring the playback state of the digital medium; and

contents decoding means for decoding the encrypted contents by using the decoding key;

wherein the decoding key is obtained by the key obtaining means and stored in the key holding means, the encrypted contents read from the digital medium is decoded with the decoding key by the contents decoding means to play the contents, and the decoding key stored in the key holding means is discarded according to the playback state of the digital medium which is obtained by the playback state obtaining means.

2. The data player of Claim 1, wherein the decoding key stored in the key holding means is discarded when it is confirmed that the playback state of the digital medium has become "STOP STATE".

003730-031300 0540783-031300

by the contents key decoding means to obtain the contents key, the encrypted contents read from the digital medium is decoded by using the contents key to play the contents, and the decoding key stored in the key holding means is discarded according to the playback state of the digital media which is obtained by the playback state obtaining means.

6. The data player of Claim 5, wherein the decoding key stored in the key holding means is discarded when it is confirmed that the playback state of the digital medium has become "STOP STATE".

7. The data player of Claim 5, wherein said digital medium is a DVD.

8. The data player of Claim 6, wherein said digital medium is a DVD.

9. A key storage device comprising:

decoding key storage means for storing a decoding key for decoding encrypted data recorded on a digital medium;

key read authorization means for authorizing an external device to read the decoding key when the external device plays the encrypted data; and

key read history recording means for recording the readout record of the decoding key to the external device;

008180-031800

said key read authorization means receives a key request signal including a key read time which is the time when the external device made a request to read the decoding key, and authorizes the external device to read the decoding key after confirming that the key read time is later than the latest time amongst the read history data of the decoding key which is stored in the key read history storage means, and that the key request time is within the key read available period, and that the key read history data has been recorded by the key read history recording means.

10. The key storage device of Claim 9, wherein said key read history recording unit generates and records, in addition to the key read history data, an alteration detection code by which alteration on the key read history data can be detected.

11. The key storage device of Claim 9, wherein said key read authorization means authorizes the external device to read the decoding key after confirming that the key read history data is not altered, from the alteration detection code added to the key read history data.

12. The key storage device of Claim 10, wherein said key read

13. The key storage device of Claim 9, wherein:

said key read authorization means does not authorize the external device to read the decoding key when the key read history data has reached the storage capacity of the key read history recording means.

key obtaining means for obtaining the decoding key for decoding the encrypted data, from a key storage unit which stores the decoding key;

data embedding means for embedding data in the data decoded by the decoding means; and

wherein said decoding key is obtained by the key obtaining

15. The data player of Claim 14, wherein:

said data embedding means further embeds the ID code of the key storage unit in the decoded data.

said data embedding means comprises sequence generation means for converting a pattern to be embedded to a sequence to be embedded in each video frame, and embedding means for embedding the sequence in each video frame by watermarking; and

said sequence generation means converts the pattern to be embedded to the sequence to be embedded such that short-period patterns and a long-period pattern are mixed in the sequence; said short-period patterns are obtained by dividing the pattern to be embedded according to the number of bits to be embedded in each frame and embedding the bits in each frame, and said long-period pattern is obtained by dividing the pattern to be embedded, bit by bit, and embedding the divided bits over plural frames which are plural times as many as the number into which the

pattern to be embedded is divided.

17. The data player of Claim 15, wherein:

said data embedding means comprises sequence generation means for converting a pattern to be embedded to a sequence to be embedded in each video frame, and embedding means for embedding the sequence in each video frame by watermarking; and

said sequence generation means converts the pattern to be embedded to the sequence to be embedded such that short-period patterns and a long-period pattern are mixed in the sequence, said short-period patterns are obtained by dividing the pattern to be embedded according to the number of bits to be embedded in each frame and embedding the bits in each frame, and said long-period pattern is obtained by dividing the pattern to be embedded, bit by bit, and embedding the divided bits over plural frames which are plural times as many as the number into which the pattern to be embedded is divided.

18. The data player of Claim 16, wherein said key obtaining means generates a key read history signal including the key read time and the device ID code of this data player, and transmits this signal to the key storage unit which stores the decoding key.

19. A digital contents player for reading data encrypted by a decoding key from a digital medium, and playing the data,

comprising:

key storage means for storing the decoding key for decoding the encrypted data; and

data playback means for reading the decoding key from the key storage means, and playing the data using the decoding key;

wherein said data playback means and said key storage means are removable from each other; and

when said data playback means reads the decoding key, said key storage means records key read history data including a device ID code of this digital contents player and a key read time when a request to read the decoding key was made; and

said data playback means embeds the key read time and the device ID code in the data played with the decoding key.

20. The digital contents player of Claim 19 wherein:

said data to be embedded is converted into a sequence to be embedded in each video frame, and then embedded by watermarking; and

said sequence to be embedded is a mixture of short-period patterns and a long-period pattern, said short-period patterns are obtained by dividing the pattern to be embedded according to the number of bits to be embedded in each frame and embedding the bits in each frame, and said long-period pattern is obtained by dividing the pattern to be embedded, bit by bit, and embedding the divided bits over plural frames which are plural times as

05640783-081800

many as the number into which the pattern to be embedded is divided.

21. A key read history recording method comprising the steps of:
 recording available period data which is the available period for reading a decoding key for decoding encrypted data;

recording, as a key nonuse period, a difference between a key read time when a request to read the decoding key was made and a time which has been recorded at a time that is previous and nearest to the key read time;

recording key read history data including the key read time and the device ID code of a data player; and

recording the time when use of the decoding key has ended, as an end-of-key-use time.

22. A data embedding apparatus comprising:

sequence generation means for converting a pattern to be embedded into a sequence to be embedded in each video frame; and

embedding means for embedding the sequence in each video frame by watermarking;

wherein said sequence generation means converts the pattern to be embedded into the sequence to be embedded such that short-period patterns and a long-period pattern are mixed in the sequence, said short-period patterns are obtained by dividing the pattern to be embedded according to the number of bits to be

009640783-031800

embedded in each frame and embedding the bits in each frame, and said long-period pattern is obtained by dividing the pattern to be embedded, bit by bit, and embedding the divided bits over plural frames which are plural times as many as the number into which the pattern to be embedded is divided.

23. A data embedding apparatus comprising:

real time measuring means for outputting real time data which specifies the present time; and

data embedding means for embedding the real time data in video/audio data.

24. The data embedding apparatus of Claim 23, wherein said data embedding means embeds the real time data at the time when the video/audio data is input to this apparatus, in the video/audio data which is input in the visible/audible state to this apparatus.

25. A data embedding apparatus comprising:

real position measuring means for outputting real position data which specifies the present physical position; and

data embedding means for embedding the real position data in video/audio data.

26. The data embedding apparatus of Claim 25, wherein said data

009640783-001800

27. A data embedding method comprising:

28. The data embedding method of Claim 27 wherein the real time data at the time when the video/audio data is input, is embedded in the video/audio data which is input in the visible/audible state.

a real position measuring step of outputting real position data which specifies the present position; and

30. The data embedding method of Claim 29 wherein the real position data at the time when the video/audio data is input, is embedded in the video/audio data which is input in the

31. An embedded data detection apparatus for detecting embedded data from playback data in which the data is embedded by a data embedding apparatus which comprises: sequence generation means for generating a sequence in which short-period patterns and a long-period pattern are mixed, said short-period patterns being obtained by dividing a pattern to be embedded according to the number of bits to be embedded in each frame and embedding the bits in each frame, and said long-period pattern being obtained by dividing the pattern to be embedded, bit by bit, and embedding the divided values over plural frames which are plural times as many as the number into which the pattern to be embedded is divided; and data embedding means for embedding the sequence in each video frame by watermarking;

intra-frame embedded data detection means for detecting the added pattern from each video frame;

long-period embedded pattern detection means for calculating the embedded pattern with reference to long-period embedded bits.

detecting embedded data from visible/audible data in which real time data that can specify the present time, real position data that can specify the present position, or a device ID code of a device for playing the visible/audible data is embedded; and

33. A playback system comprising a data output unit for outputting data, and a data player, said data player comprising decoding means for decoding input data to video/audio data which is visible or audible, real time measuring means for outputting real time data which can specify the present time, and data embedding means for embedding the real time data in the video/audio data,

wherein the real time data measured by the real time measuring means at the time when the data player plays the input data is embedded in the video/audio data.

34. The playback system of Claim 33 comprising one piece of said real time measuring means, and at least one piece of said data output unit.

35. A playback system comprising a data output unit for outputting data, and a data player, said data player comprising

decoding means for decoding input data to video/audio data which is visible or audible, real position measuring means for outputting real position data which can specify the present position, and data embedding means for embedding the real position data in the video/audio data,

wherein the real position data measured by the real position measuring means at the time when the data player plays the input data is embedded in the video/audio data.

36. The playback system of Claim 35 comprising one piece of said real position measuring means, and at least one piece of said data output unit.

003730 68204900

ABSTRACT OF THE DISCLOSURE

A data player for reading contents encrypted by a decoding key from a digital medium, and playing the encrypted contents by using the decoding key which is stored in a key storage unit, comprises: a key obtaining unit for performing mutual authentication with the key storage unit to obtain the decoding key stored in the key storage unit; a key holding unit for holding the decoding key; a playback state obtaining unit for monitoring the playback state of the digital medium; and a contents decoding unit for decoding the encrypted contents by using the decoding key. The decoding key is obtained by the key obtaining unit and stored in the key holding unit, and the encrypted contents read from the digital medium is decoded with the decoding key by the contents decoding unit to play the contents. The decoding key stored in the key holding unit is discarded according to the playback state of the digital medium which is obtained by the playback state obtaining unit.

003739-031300 09640783-031300

003120" 23404950

Fig.1



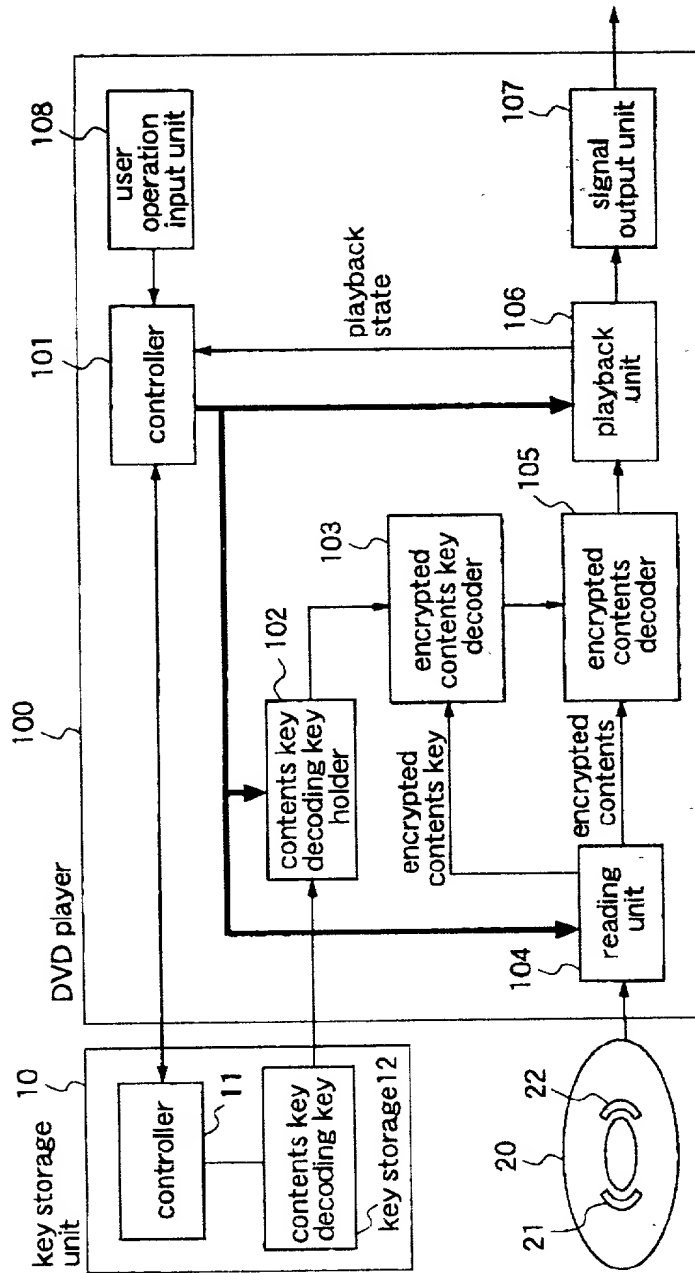


Fig.2

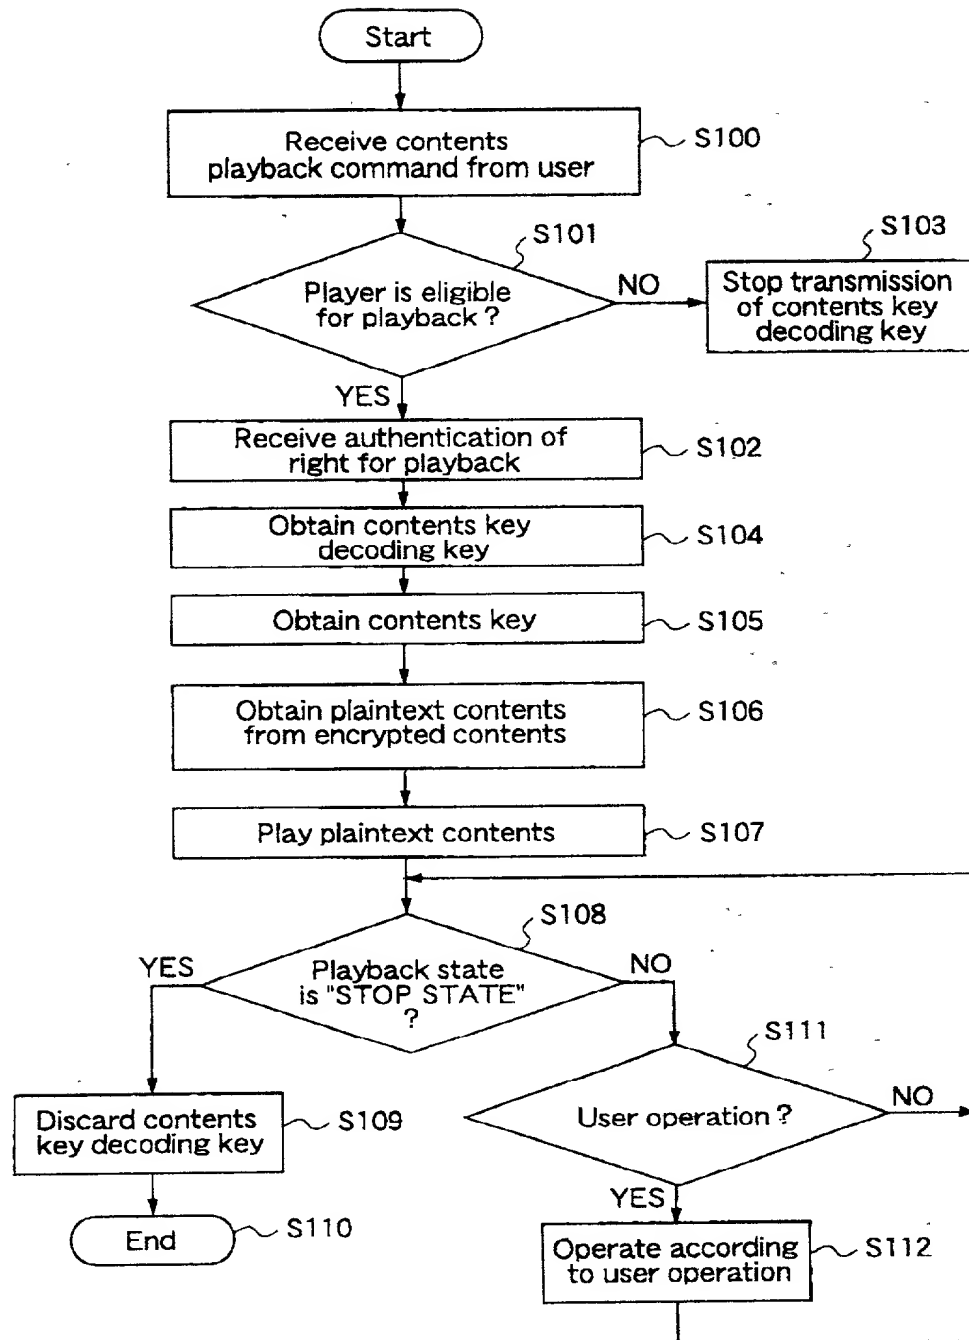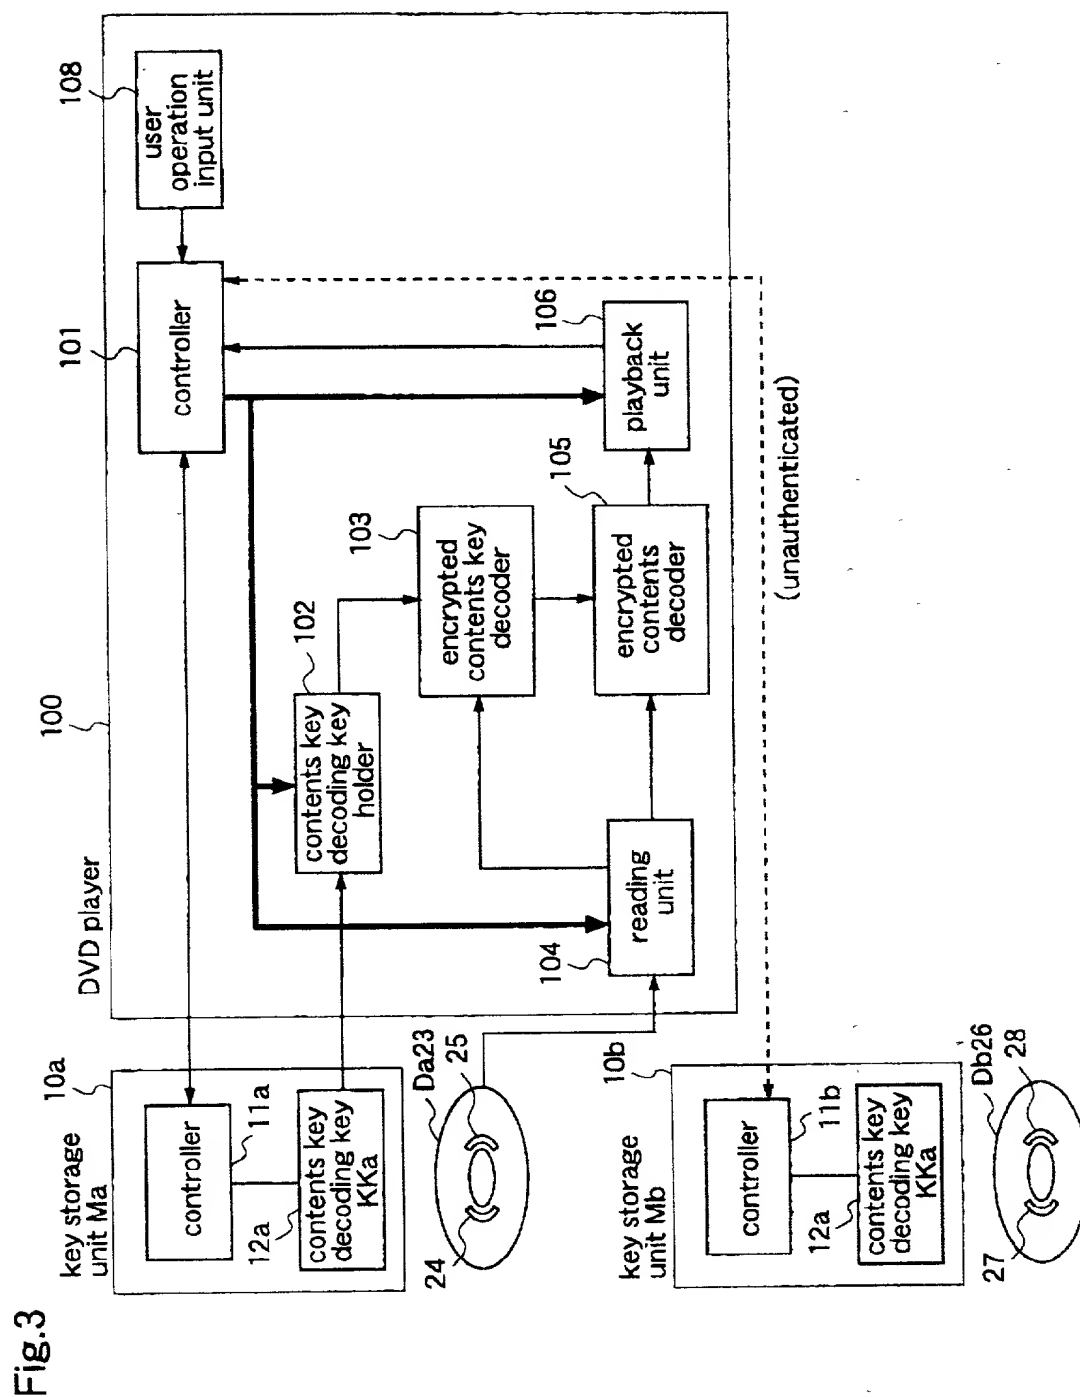

COPYRIGHT © 2000




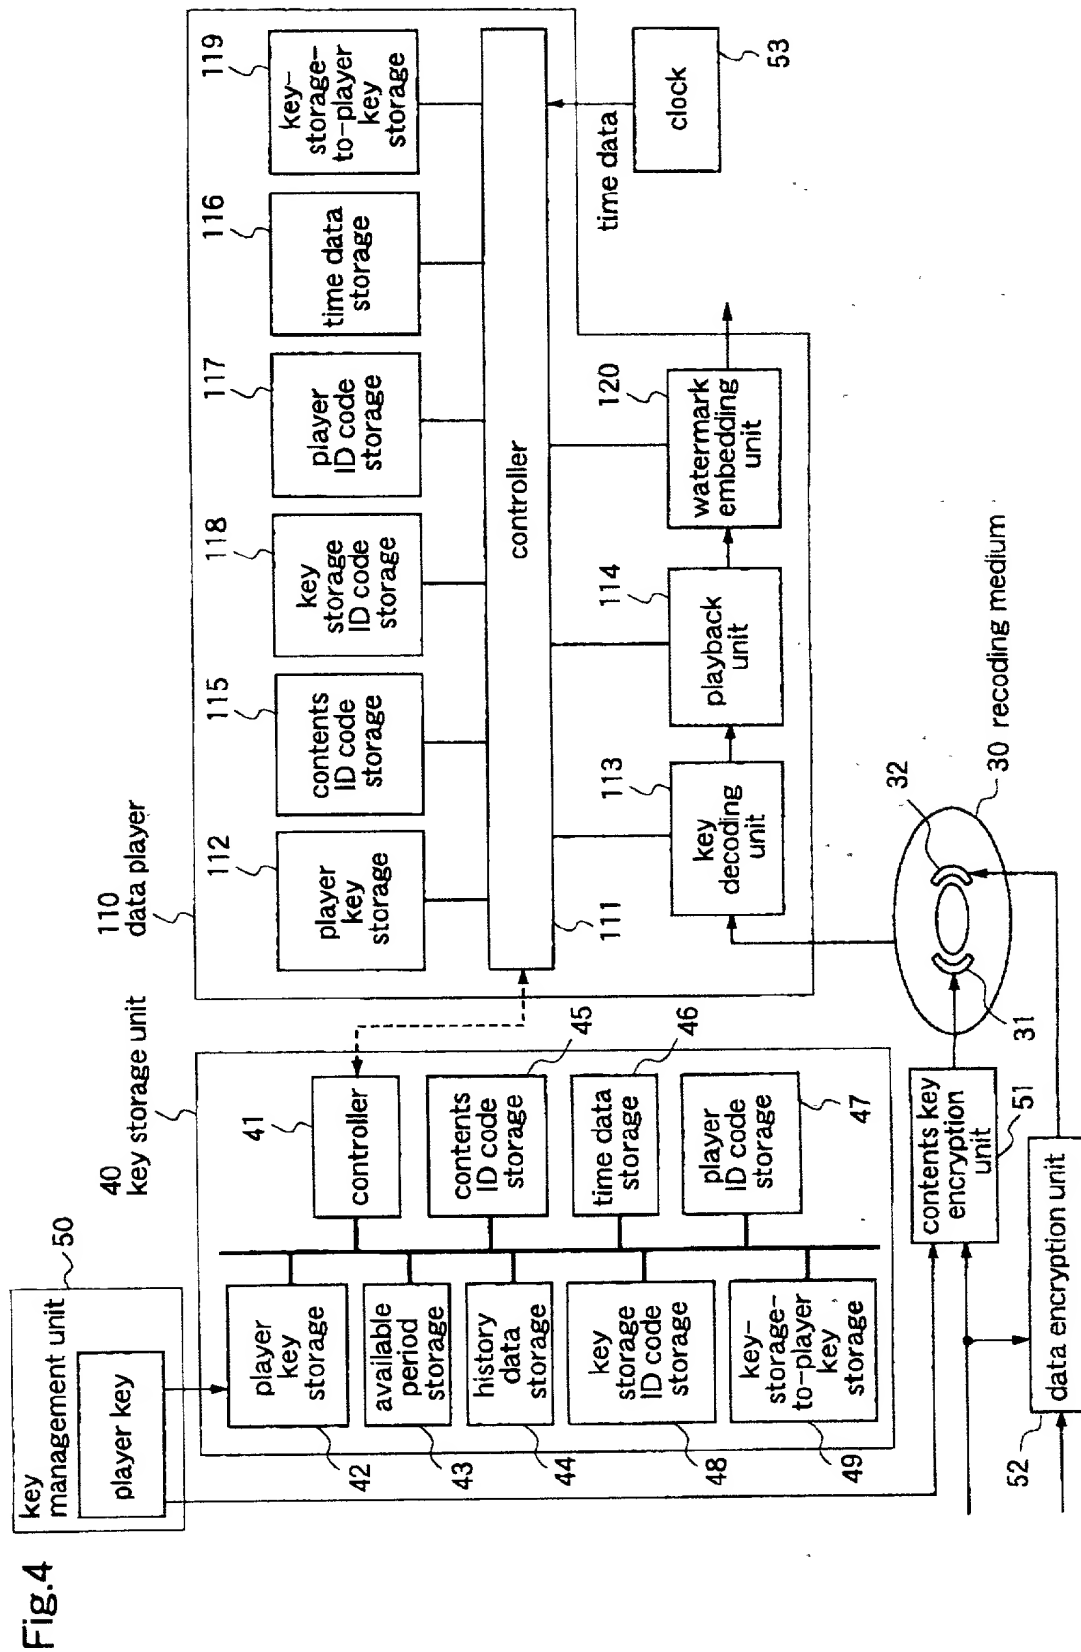


Fig.5

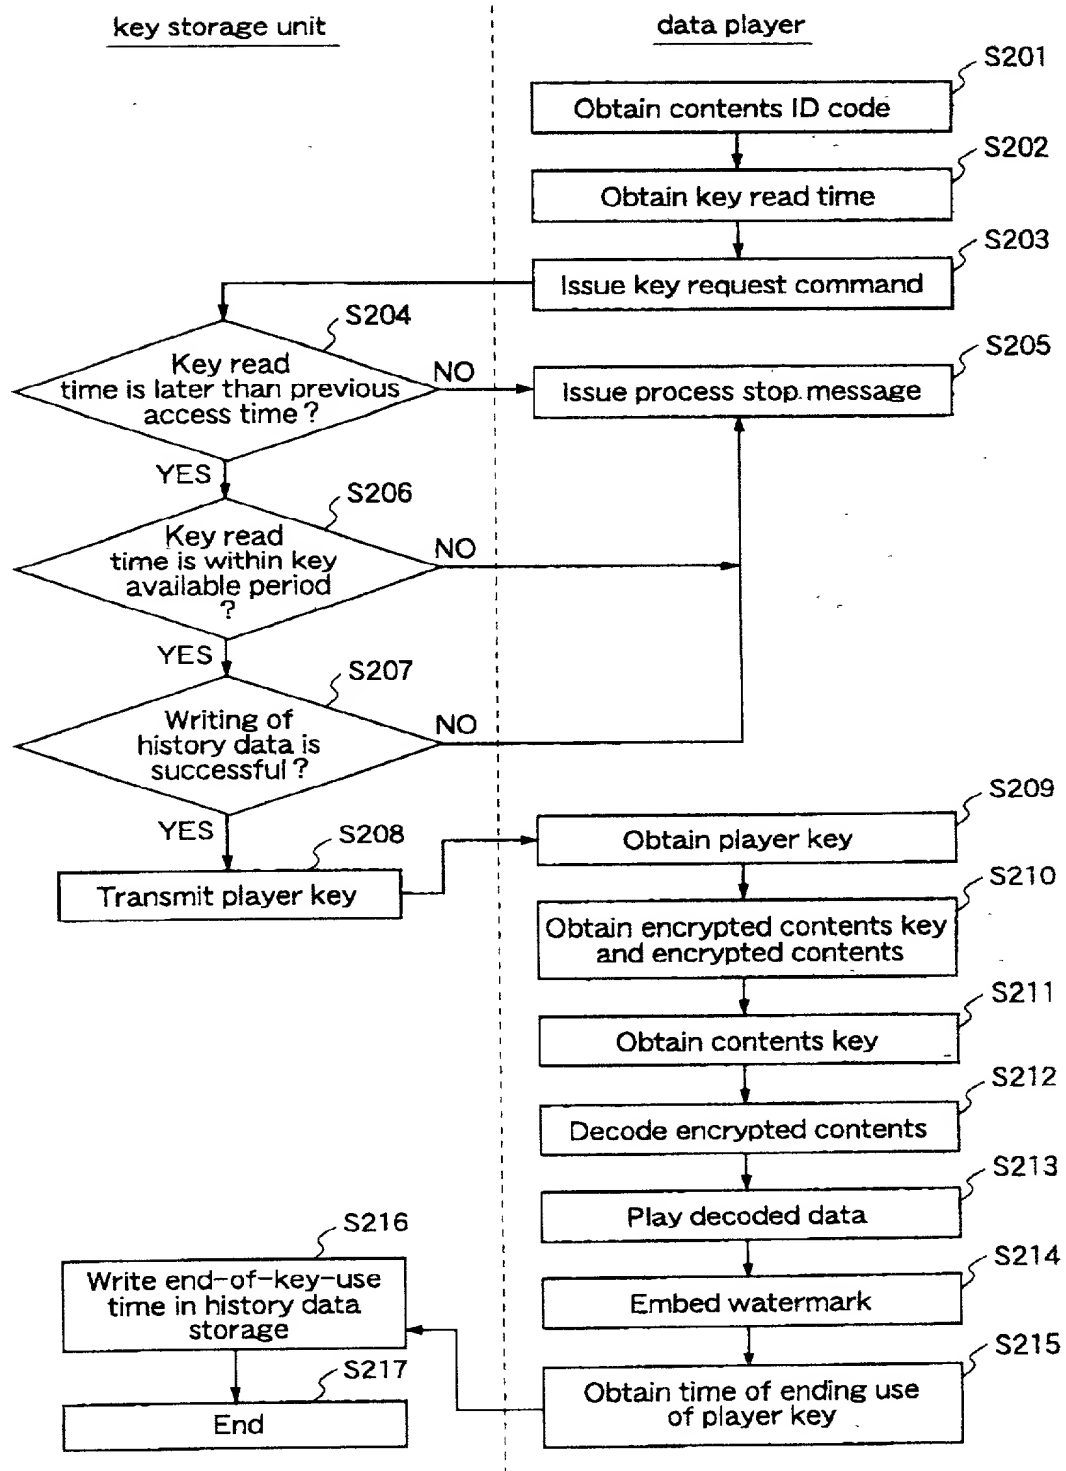

003130" 5344350

Fig.6

key available time			hash value 1
key nonuse period	key available time	start time 1	hash value 2
start time 1	player ID code 1	contents ID code 1	hash value 3
end time 1	player ID code 1	contents ID code 1	hash value 4
key nonuse period	end time 1	start time 2	hash value 5
start time 2	player ID code 2	contents ID code 2	hash value 6
end time 2	player ID code 2	contents ID code 2	hash value 7

003130" E3204960

Fig.7


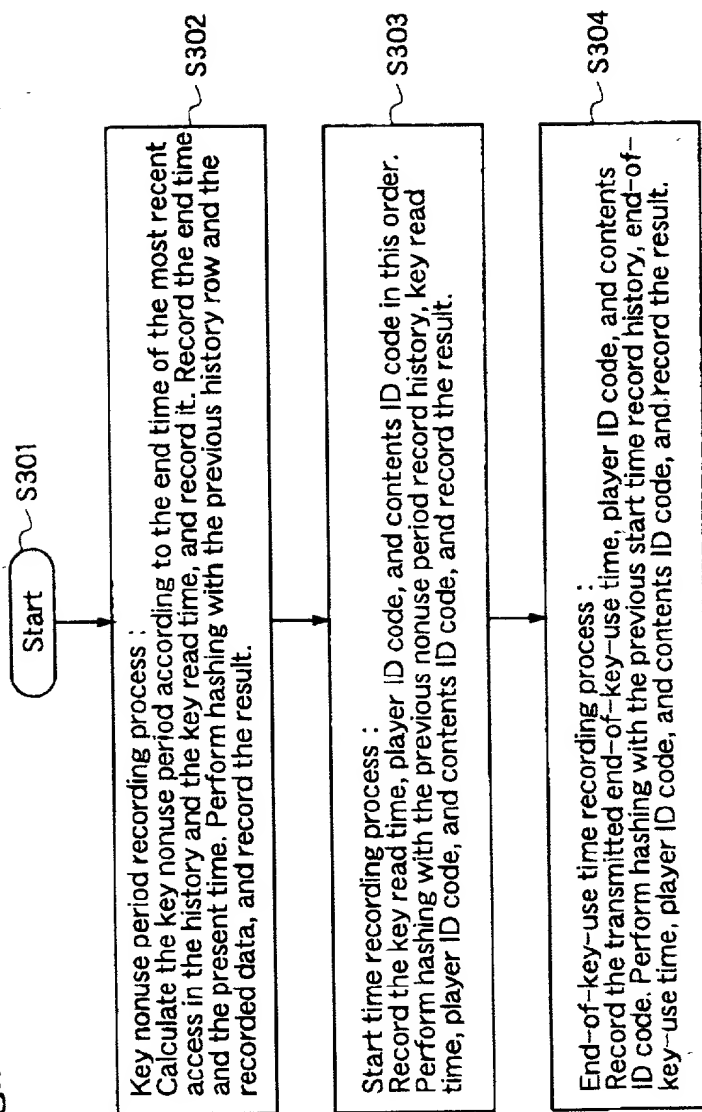


Fig.8

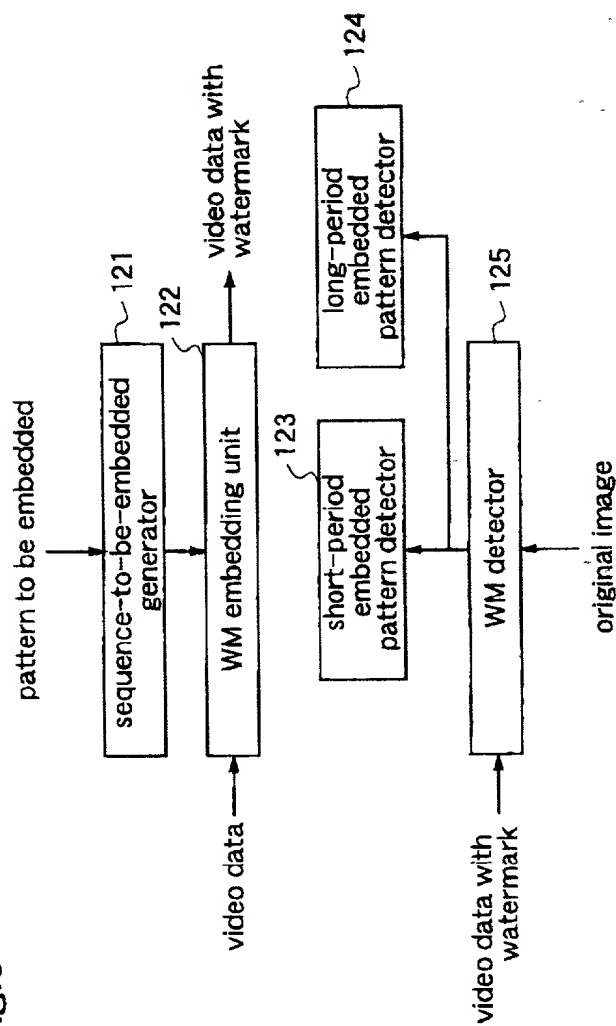

003730" 83404950

Fig.9

6 5 C a
pattern to be embedded 0110 0101 1100 1010

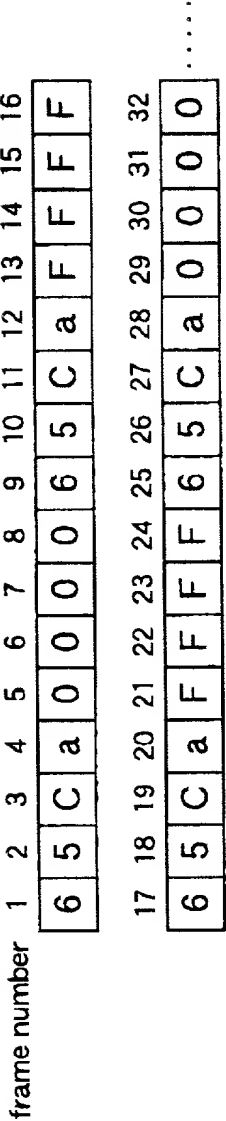


Fig.11

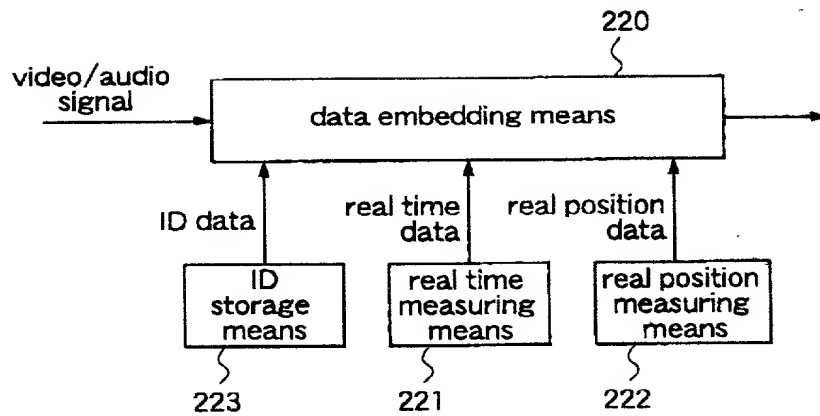


Fig.12

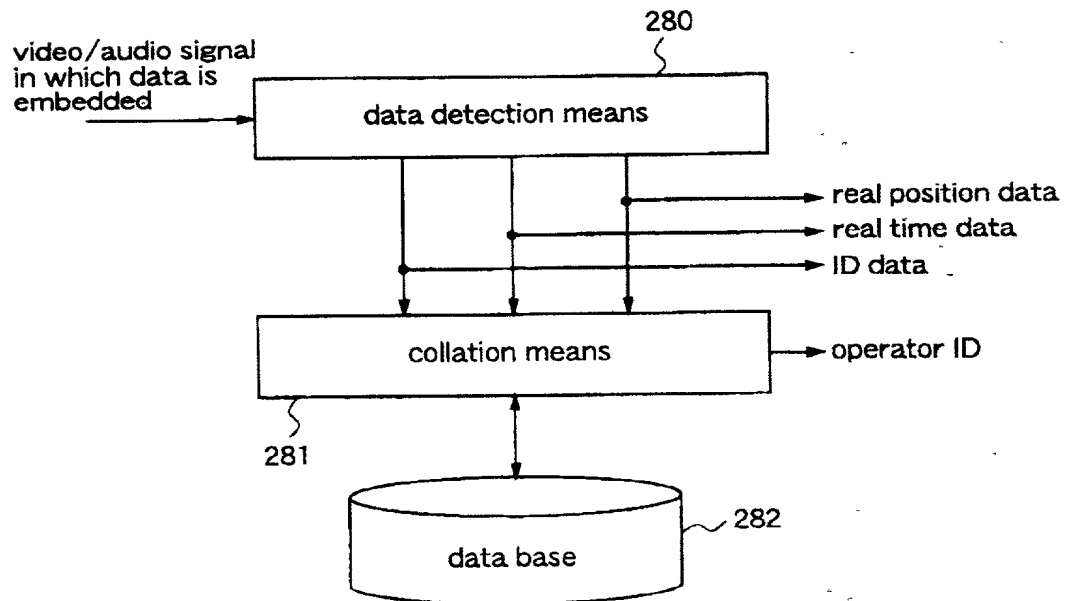


Fig.13

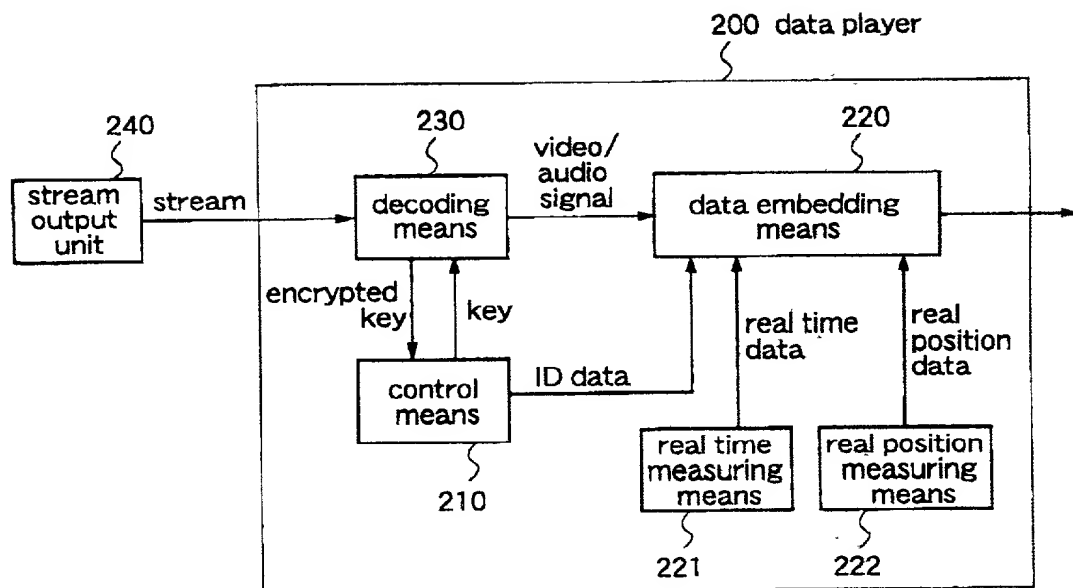


Fig.14

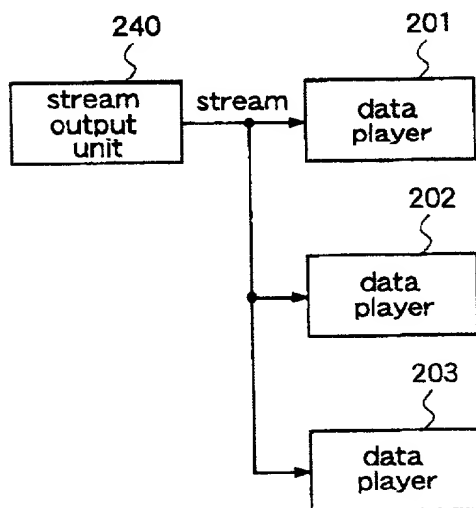


Fig.15



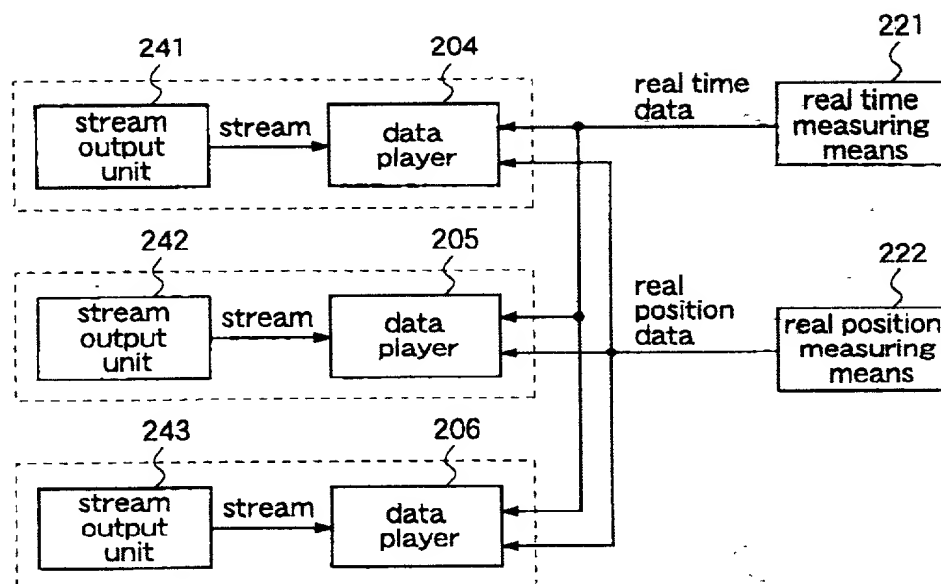



Fig.16

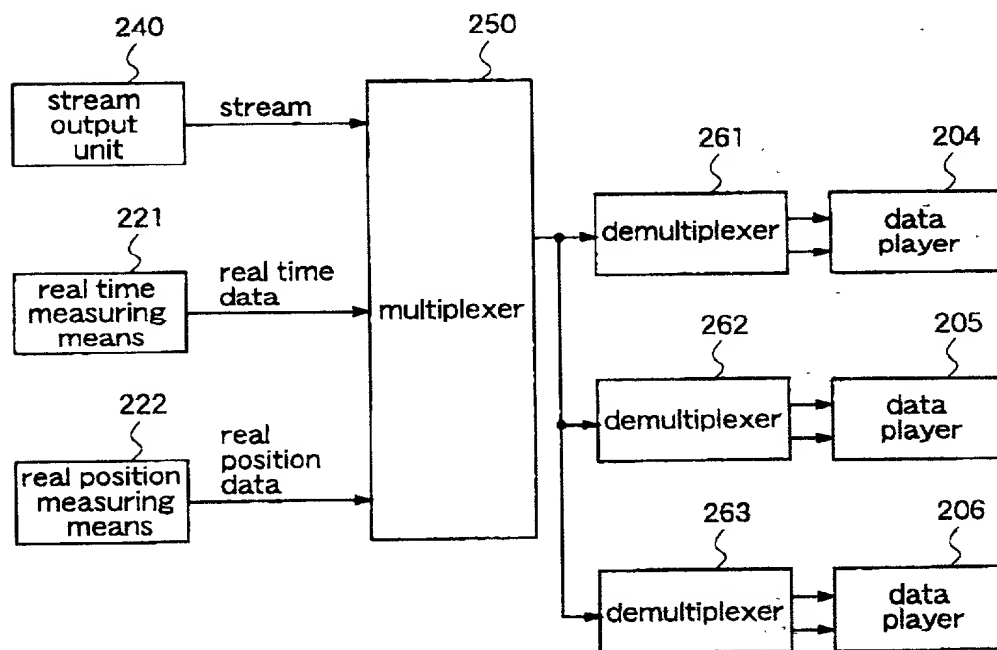

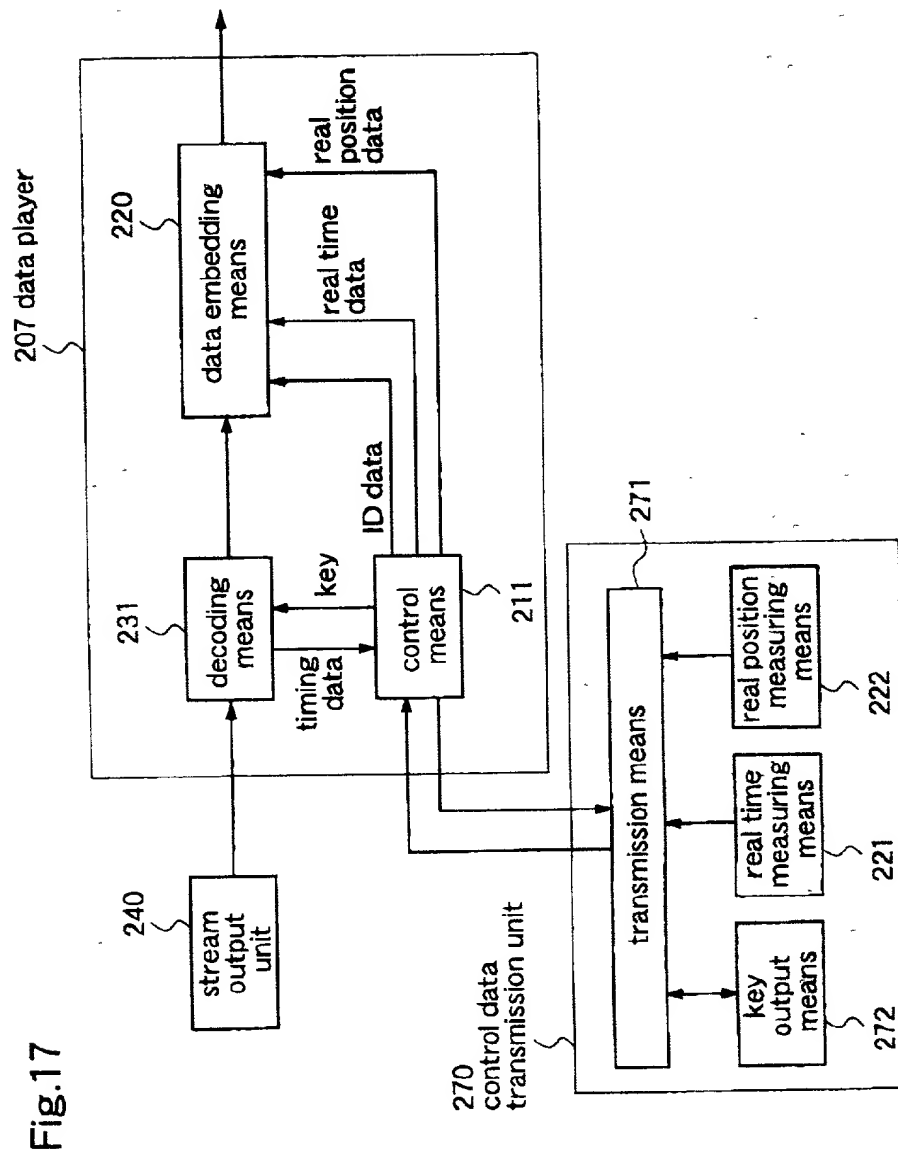

003730" E2404960

Fig.18 Prior Art

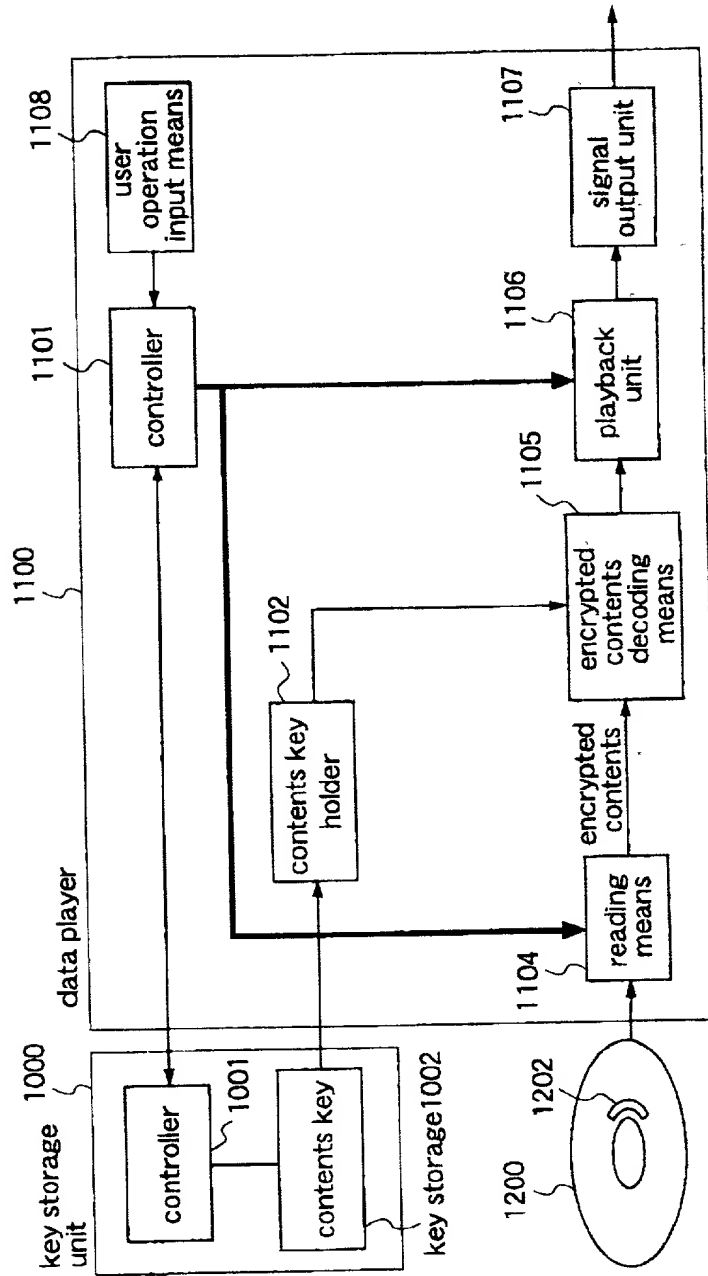

DECLARATION AND POWER OF ATTORNEY FOR U.S. PATENT APPLICATION

(x) Original () Supplemental () Substitute () PCT () DESIGN

As a below named inventor, I hereby declare that: my residence, post office address and citizenship are as stated below next to my name; that I verily believe that I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural inventors are named below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

Title: DATA PLAYER, DIGITAL CONTENTS PLAYER, PLAYBACK SYSTEM, DATA EMBEDDING APPARATUS, AND EMBEDDED DATA DETECTION APPARATUS

of which is described and claimed in:

() the attached specification, or

(x) the specification in application Serial No. _____, filed August 18, 2000, and with amendments through (if applicable), or

() the specification in International Application No. _____, filed _____, and as amended on (if applicable).

I hereby state that I have reviewed and understand the content of the above-identified specification, including the claims, as amended by any amendment(s) referred to above.

I acknowledge my duty to disclose to the Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, §1.56.

I hereby claim priority benefits under Title 35, United States Code, §119 (and §172 if this application is for a Design) of any application(s) for patent or inventor's certificate listed below and have also identified below any application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

COUNTRY	APPLICATION NO.	DATE OF FILING	PRIORITY CLAIMED
Japan	11-233813	August 20, 1999	YES
Japan	11-233814	August 20, 1999	YES
Japan	11-233815	August 20, 1999	YES

I hereby claim the benefit under Title 35, United States Code §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code §112, I acknowledge the duty to disclose information material to patentability as defined in Title 37, Code of Federal Regulations, §1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

APPLICATION SERIAL NO.	U.S. FILING DATE	STATUS: PATENTED, PENDING, ABANDONED

And I hereby appoint Michael R. Davis, Reg. No. 25,134; Matthew M. Jacob, Reg. No. 25,154; Jeffrey Noltan, Reg. No. 25,408; Warren M. Cheek, Jr., Reg. No. 33,367; Nils Pedersen, Reg. No. 33,145; and Charles R. Watts, Reg. No. 33,142, who together constitute the firm of WENDEROTH, LIND & PONACK, L.L.P., jointly and severally, attorneys to prosecute this application and to transact all business in the U.S. Patent and Trademark Office connected therewith.

I hereby authorize the U.S. attorneys named herein to accept and follow instructions from HAYASE & CO. as to any action to be taken in the U.S. Patent and Trademark Office regarding this application without direct communication between the U.S. attorneys and myself. In the event of a change in the persons from whom instructions may be taken, the U.S. attorneys named herein will be so notified by me.

Send Correspondence to

WENDEROTH, LIND & PONACK, L.L.P.
2033 K Street, N.W., Suite 800
Washington, D.C. 20006

Direct Telephone Calls to:

WENDEROTH, LIND & PONACK, L.L.P.
Area Code (202) 721-8200

Direct Facsimile Messages to:

Area Code (202) 721-8250

Full Name of First Inventor	FAMILY NAME KAWADA	FIRST GIVEN NAME Hirotsugu	SECOND GIVEN NAME
Residence & Citizenship	CITY Osaka	STATE OR COUNTRY Japan	COUNTRY OF CITIZENSHIP Japan
Post Office Address	ADDRESS 7-3-3, Uenoshibacho, Sakai-shi, Osaka,	CITY Osaka,	STATE OR COUNTRY 593-8301 Japan
Full Name of Second Inventor	FAMILY NAME KATTA	FIRST GIVEN NAME Noboru	SECOND GIVEN NAME
Residence & Citizenship	CITY Hyogo	STATE OR COUNTRY Japan	COUNTRY OF CITIZENSHIP Japan
Post Office Address	ADDRESS 1-49-1, Mizugaoka, Itami-shi, Hyogo	CITY Itami-shi, Hyogo	STATE OR COUNTRY 664-0017, Japan
Full Name of Third Inventor	FAMILY NAME IBARAKI	FIRST GIVEN NAME Susumu	SECOND GIVEN NAME
Residence & Citizenship	CITY Osaka	STATE OR COUNTRY Japan	COUNTRY OF CITIZENSHIP Japan
Post Office Address	ADDRESS 3-23-A-302, Higashitoyonakacho, Toyonaka-shi, Osaka	CITY Toyonaka-shi, Osaka	STATE OR COUNTRY 560-0003 Japan
Full Name of Fourth Inventor	FAMILY NAME TATEBAYASHI	FIRST GIVEN NAME Makoto	SECOND GIVEN NAME
Residence & Citizenship	CITY Hyogo	STATE OR COUNTRY Japan	COUNTRY OF CITIZENSHIP Japan
Post Office Address	ADDRESS 1-16-21, Mefu, Takarazuka-shi, Hyogo	CITY Takarazuka-shi, Hyogo	STATE OR COUNTRY 665-0852 Japan
Full Name of Fifth Inventor	FAMILY NAME HARADA	FIRST GIVEN NAME Shunji	SECOND GIVEN NAME
Residence & Citizenship	CITY Osaka	STATE OR COUNTRY Japan	COUNTRY OF CITIZENSHIP Japan
Post Office Address	ADDRESS 2-20-52, Tamadenishi, Nishinari-ku, Osaka-shi, Osaka	CITY Nishinari-ku, Osaka-shi, Osaka	STATE OR COUNTRY 557-0045 Japan
Full Name of Sixth Inventor	FAMILY NAME	FIRST GIVEN NAME	SECOND GIVEN NAME
Residence & Citizenship	CITY	STATE OR COUNTRY	COUNTRY OF CITIZENSHIP
Post Office Address	ADDRESS	CITY	STATE OR COUNTRY ZIP CODE

I further declare that all statements made herein of my own knowledge are true, and that all statements on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

1st Inventor	_____	Date	_____
	Hirotsugu KAWADA		
2nd Inventor	_____	Date	_____
	Noboru KATTA		
3rd Inventor	_____	Date	_____
	Susumu IBARAKI		
4th Inventor	_____	Date	_____
	Makoto TATEBAYASHI		
5th Inventor	_____	Date	_____
	Shunji HARADA		
6th Inventor	_____	Date	_____

The above application may be more particularly identified as follows:

U.S. Application Serial No. _____ Filing Date August 18, 2000

Applicant Reference Number P-23109-01 Atty Docket No. 2000_1134A

Title of Invention DATA PLAYER, DIGITAL CONTENTS PLAYER, PLAYBACK SYSTEM, DATA EMBEDDING APPARATUS, AND EMBEDDED DATA DETECTION APPARATUS

003430 "E3430"